


SPACER SUPPORT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm




P.C.B Ø4.0
THICKNESS 1.2-1.7




| PARTNO | A | B | C | S | PACKAGE |
|---------|------|-----|------|-------------|---------|
| SCB-6 | 6.3 | 7.8 | 10.0 | 6-32 UNC | 1000 |
| SCB-10 | 9.5 | 7.8 | 10.0 | | |
| SCB-12 | 12.7 | 7.8 | 10.0 | | |
| SCB-15 | 15.9 | 7.8 | 10.0 | | |
| SCB-15A | 15.9 | 4.8 | 10.0 | | |

P.C.B Ø4.0
THICKNESS 1.2-1.7

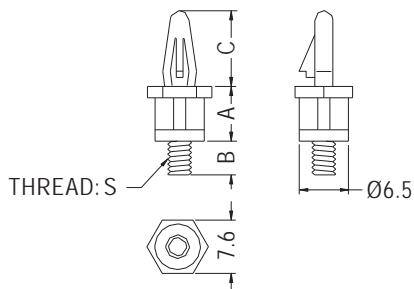

| PARTNO | A | B | C | S | PACKAGE |
|----------|------|-----|------|----------|---------|
| SCB-8.5S | 8.5 | 4.5 | 10.0 | 6-32 UNC | 1000 |
| SCB-10SA | 10.0 | 4.5 | 10.0 | | |

P.C.B Ø4.0
THICKNESS 1.2-1.7

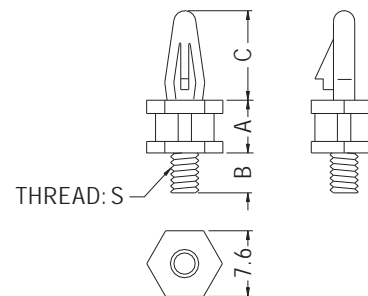


| PARTNO | A | B | C | S | PACKAGE |
|----------|------|-----|------|----------|---------|
| SCB-6SM3 | 6.3 | 4.8 | 10.0 | M3X0.5P | 1000 |
| SCB-6S | 6.3 | 4.8 | 10.0 | 6-32 UNC | |
| SCB-8S | 8.0 | 4.5 | 10.0 | | |
| SCB-10S | 10.0 | 4.5 | 10.0 | | |

SPACER SUPPORT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm




P.C.B Ø4.0
THICKNESS: E




FOR SCB4-5

P.C.B Ø4.0
THICKNESS: E



FOR SCB4-6, SCB4-6A
SCB4-16

P.C.B Ø4.0
THICKNESS: E



FOR SCB4-23.8,
SCB4-30



| PARTNO | A | B | C | D | E | S | PACKAGE |
|-----------|------|------|------|-----|---------|---------|---------|
| SCB4-5 | 5.0 | 6.0 | 9.4 | 8.0 | 1.6 | M4X0.7P | 1000 |
| SCB4-6 | 6.3 | 4.8 | 10.7 | 7.6 | 1.2~1.7 | | |
| SCB4-6A | 6.3 | 6.4 | 10.7 | 7.6 | 1.2~1.7 | | |
| SCB4-16 | 15.9 | 6.4 | 10.0 | 8.0 | 1.6~1.8 | | |
| SCB4-23.8 | 23.8 | 6.35 | 9.0 | 6.8 | 1.6 | | |
| ★ SCB4-30 | 30.0 | 6.35 | 9.0 | 6.8 | 1.6 | | |

