



SPACER SUPPORT

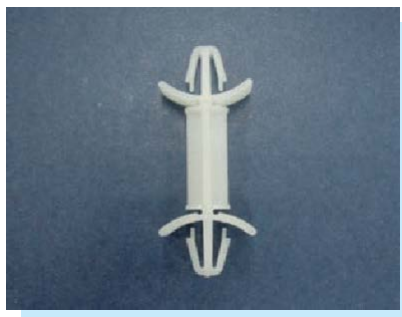


- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

CHASSIS Ø4.8
THICKNESS 0.8-2.0



CHASSIS Ø4.8
THICKNESS 0.8-2.0

CHASSIS Ø4.8
THICKNESS 0.8-2.0



CHASSIS Ø4.8
THICKNESS 0.8-2.0
FOR LCBYR-4.8


PART NO	A	PACKAGE
LCBY-4.8	4.8	1000
LCBY-6.4	6.4	
LCBY-9.5	9.5	
LCBY-12.7	12.7	
LCBY-15.9	15.9	
LCBY-19.1	19.1	
LCBY-22.2	22.2	

PART NO	A	PACKAGE
LCBYR-4.8	4.4	1000

SPACERSUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



P.C.B Ø2.0
THICKNESS 0.8-1.6


P.C.B Ø2.0
THICKNESS 0.8-1.6

PART NO	PACKAGE
MADG-5.4	2000

SPACER SUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



P.C.B Ø3.0
THICKNESS 1.6


P.C.B Ø3.0
THICKNESS 1.6

PART NO	A	PACKAGE
LCA-6	6.3	1000
LCA-8	8.0	
LCA-10	10.0	
LCA-12	12.7	

SPACER SUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



P.C.B Ø4.0
THICKNESS 1.6

CHASSIS Ø4.0
THICKNESS 0.8

PART NO	PACKAGE
LCL-3.2	2000

