



SPACER SUPPORT

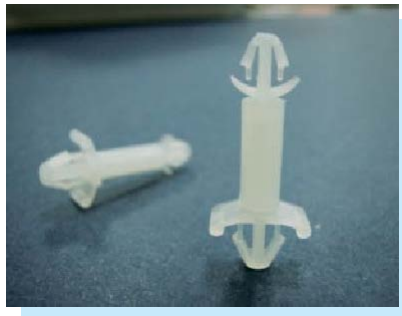

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

P.C.B Ø3.0
THICKNESS 0.8-2.0



CHASSIS Ø4.0
THICKNESS 1.2-2.6


PART NO	A	PACKAGE
LCH-3	3.5	2000
LCH-4	4.0	
LCH-5	5.0	
LCH-6	6.3	1000
LCH-7	7.4	
LCH-8	8.5	
LCH-10	10.0	
LCH-11	11.0	
LCH-12	12.7	
LCH-15	15.9	

SPACER SUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm


P.C.B Ø3.5
THICKNESS 0.8-2.0



P.C.B Ø3.5
THICKNESS 0.8-2.0


PART NO	A	PACKAGE
CBSS-2	2.1	2000
CBSS-2.2	2.2	
CBSS-4.8	4.8	
CBSS-7	7.0	
CBSS-10	10.0	
CBSS-12.7	12.7	
CBSS-14	14.0	
CBSS-17	17.0	

SPACER SUPPORT

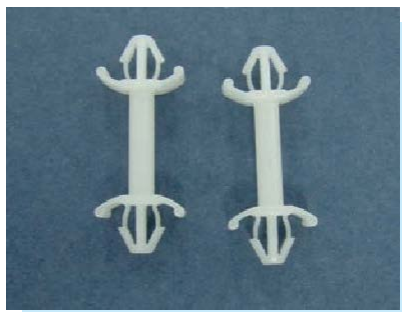

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

P.C.B Ø4.0
THICKNESS 1.6



P.C.B Ø4.0
THICKNESS 1.6


PART NO	A	B	PACKAGE
CBLSS-6	6.0	9.2	1000
CBLSS-8	8.0	11.2	
CBLSS-10	10.0	13.2	
CBLSS-12	12.0	15.2	
CBLSS-13	13.0	16.2	
CBLSS-14	14.0	17.2	
CBLSS-16	16.0	19.2	
CBLSS-16.8	16.8	20.0	
CBLSS-18	18.0	21.2	
CBLSS-20	20.0	23.2	
CBLSS-42	42.0	45.2	

SPACER SUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

P.C.B Ø4.0
THICKNESS 1.6



CHASSIS Ø4.8
THICKNESS 0.8-2.0

PART NO	A	PACKAGE
LCB-5	5.0	1000
LCB-6	6.3	
LCB-8	8.0	
LCB-10	10.0	
LCB-12	12.7	
LCB-15	15.9	
LCB-20	20.0	
LCB-25	25.0	