



# SPACER SUPPORT

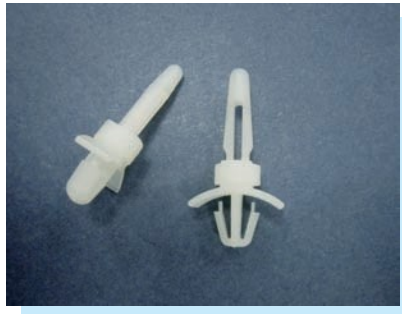

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm


P.C.B Ø4.0  
THICKNESS 1.2-1.7



CHASSIS Ø4.8  
THICKNESS 0.8-2.0

PART NO	PACKAGE
LCY-4.8	1000



# SPACER SUPPORT

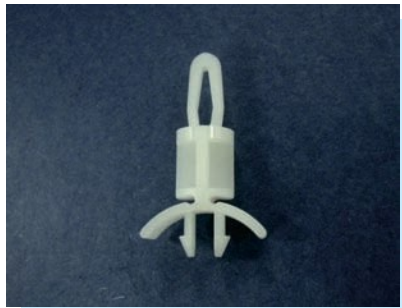

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

P.C.B Ø4.0  
THICKNESS 1.2-1.7

P.C.B Ø3.8  
THICKNESS 1.6



P.C.B Ø4.8  
THICKNESS 0.8-2.5

CHASSIS Ø4.8  
THICKNESS 0.8-2.5  
FOR UCBS-5A


PART NO	A	PACKAGE
UCBS-5	4.8	1000
UCBS-5A	4.8	
UCBS-6	6.4	
UCBS-9	9.5	
UCBS-12	12.7	
UCBS-15	15.9	
UCBS-19	19.1	
UCBS-22	22.2	

# SPACER SUPPORT



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

P.C.B Ø4.0  
THICKNESS 1.2-1.7



P.C.B Ø5.4  
THICKNESS: F

PART NO	D	F	PACKAGE
UCBSL-9	11.7	1.6	1000
UCBSL-10	12.0	2.2	

