
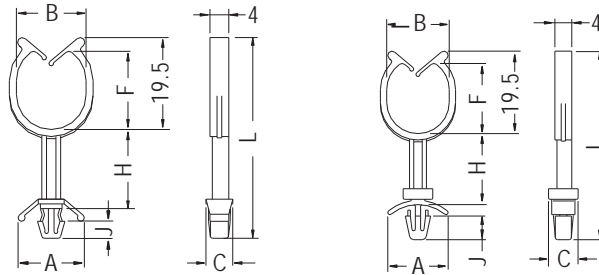


HARNESS CLIP STANDOFF

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

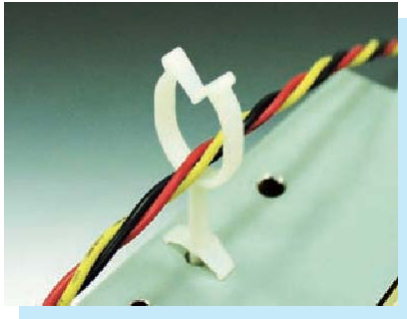

CHASSIS: ØG
THICKNESS: T



CHASSIS: ØG
THICKNESS: T
FOR THE-9

UL
E217732
UL 1565

PARTNO	A	B	C	F	G	H	J	L	T	PACKAGE
THE-9	14.3	14.8	7.0	16.2	4.8-5.0	9.5	5.6	37.3	0.5-2.3	500
THE-12	14.1	14.8	5.7	16.2	4.8-5.0	12.7	3.6	38.5	0.5-2.3	
THE-17	14.1	14.8	5.7	16.2	4.8-5.0	16.8	3.6	42.6	0.5-2.3	
THE-25	14.1	14.8	5.7	16.2	4.8-5.0	25.0	3.6	50.8	0.5-2.3	
THE-37	14.1	14.8	5.7	16.2	4.8-5.0	36.8	3.6	62.6	0.5-2.3	

WIRE HOLDER

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

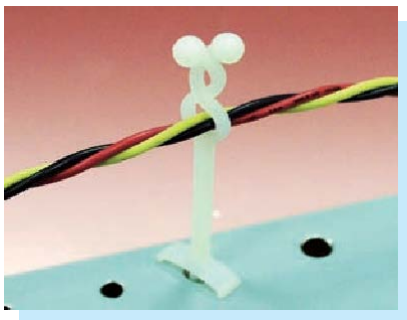

CHASSIS: ØG
THICKNESS: T

UL
E217732
UL 1565

PARTNO	A	C	G	H	J	K	L	T	PACKAGE	UL
THA-1	16.1	6.0	4.8-5.0	3.1	7.3	6.1	33.8	0.8-3.0	1000	UL
THA-2	16.0	5.9	4.8-5.0	20.0	7.3	6.1	51.0	0.8-3.0	500	UL
THA-3	16.0	5.9	4.8-5.0	35.3	7.3	6.1	66.0	0.8-3.0		UL
THA-4	16.0	6.0	4.8-5.0	2.8	7.3	9.8	39.6	0.8-3.0	1000	UL
THA-5	16.0	6.0	4.8-5.0	20.0	7.3	9.8	56.8	0.8-3.0	500	UL
THA-6	16.2	5.9	4.8-5.0	35.2	7.3	9.8	71.5	0.8-3.0		UL
THA-7	16.0	5.9	4.8-5.0	3.0	7.3	13.8	42.0	0.8-3.0	1000	UL
THA-8	16.1	6.0	4.8-5.0	20.4	7.3	13.8	59.3	0.8-3.0	500	UL
THA-9	16.0	5.9	4.8-5.0	35.8	7.3	13.8	74.7	0.8-3.0		UL
THA-10	16.0	6.0	4.8-5.0	16.2	7.3	18.4	63.5	0.8-3.0		UL
THA-11	16.0	5.4	4.8-5.0	3.0	7.3	22.3	56.8	0.8-2.5		UL
THA-12	16.0	6.0	4.8-5.0	15.8	7.3	9.7	53.1	0.8-3.0		UL
THA-14	16.0	6.0	4.8-5.0	8.0	7.3	18.7	55.3	0.8-3.0	500	UL
THA-15	16.4	6.0	4.8-5.0	10.5	7.3	6.8	43.8	0.8-3.0		UL
THA-16	10.5	6.0	4.8-5.0	5.6	7.3	7.0	34.7	0.8-2.0		
THA-19	13.8	6.0	4.8-5.0	4.4	7.2	9.8	40.9	0.8-2.5		
THA-21	12.9	4.8	3.0	8.0	3.7	7.7	37.7	0.8-2.4	1000	
THA-22	15.5	4.9	3.5	8.1	5.8	18.5	58.2	1.0-2.0	500	

