
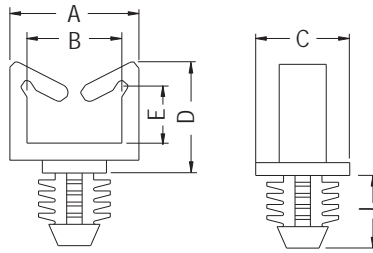


WIRE MOUNT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm


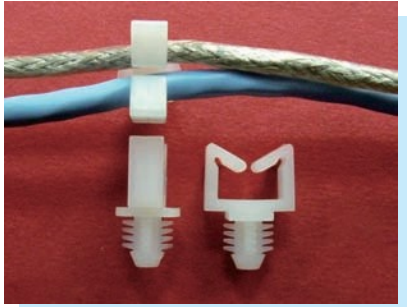


CHASSIS: ØG
THICKNESS: T

PART NO	A	B	C	D	E	G	J	T	PACKAGE
WSBH-7	15.1	11.1	11.0	13.0	6.7	7.9	8.5	6.4	1000
WSBH-12	15.5	11.1	11.1	18.3	12.3	7.9	8.5	6.4	
WSBH-19	15.1	11.1	11.1	27.2	21.0	7.9	8.7	6.4	
WSBH-29	15.1	11.1	11.0	35.0	28.7	7.9	8.5	6.4	

WIRE MOUNT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

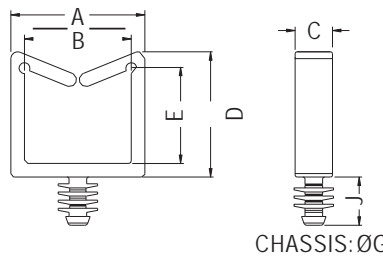
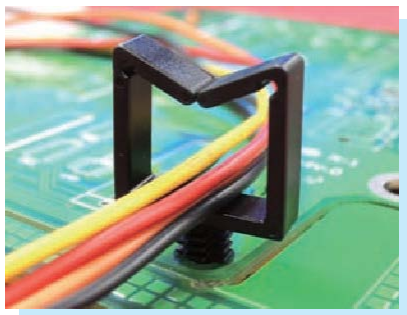


CHASSIS: ØG

PART NO	A	B	C	D	E	G	J	PACKAGE
WSBH-13	19.7	15.7	5.5	18.2	14.0	5.3	7.3	1000



WIRE MOUNT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

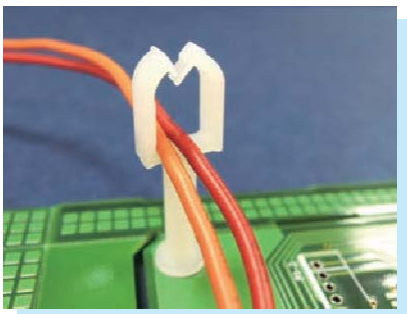

CHASSIS: ØG
THICKNESS: T

FOR MWSA-2



CHASSIS: ØG
THICKNESS: T

FOR MWSA-17.2

PART NO	A	B	C	D	F	G	J	T	PACKAGE
MWSA-2	9.1	6.7	4.6	7.3	5.5	3.8	1.9	1.6	1000
MWSA-17.2	9.2	6.8	7.0	12.0	9.5	3.8	1.8	1.7	

