


WIRE MOUNT

NEW



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/WHITE/BLACK
- ◆ UNIT: mm




MOUNTING HOLE: ØG
THICKNESS: T


PART NO	B	C	G	K	T	PACKAGE
AWKA-1	19.1	8.9	6.35	7.9~10.2	0.8~1.5	500

4

WIRE MOUNT

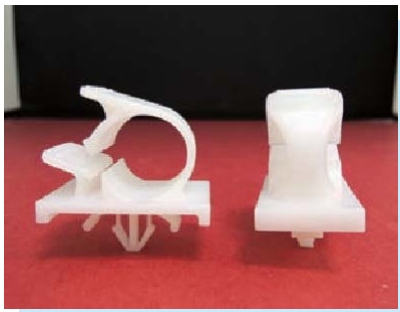


- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm




MOUNTING HOLE: ØG
THICKNESS: T

PART NO	B	C	G	K	T	PACKAGE
FWK-5	31.8	19.3	5.0~6.0	12.7	0.6~2.7	1000

WIRE MOUNT

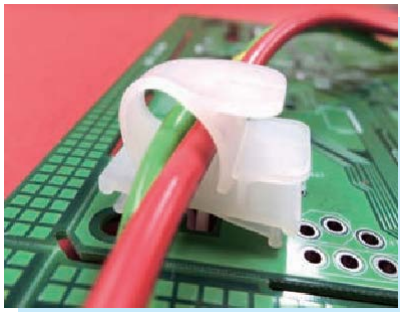


- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm





MOUNTING HOLE: ØG
THICKNESS: T

PART NO	B	C	G	K	T	PACKAGE
FWKA-1	23.9	14.7	6.5~7.0	9.5	0.6~2.7	250

WIRE MOUNT

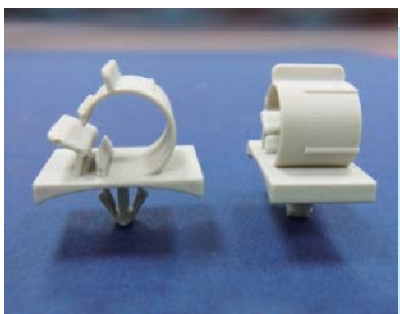

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK/GRAY
- ◆ UNIT: mm

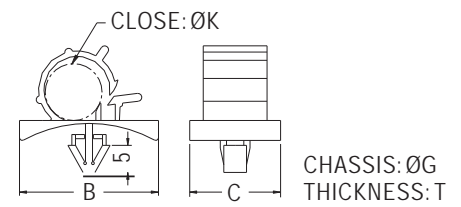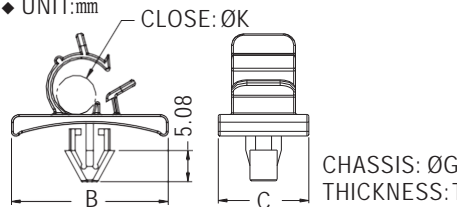

FOR WL-1

PART NO	B	C	G	K	T	PACKAGE
WL-1	25.7	16.8	6.5	10.5	0.8~1.6	500
WL-2	35.05	22.35	6.35	19.05	0.5~2.0	100
WL-3	25.4	14.73	6.35	6.35	2.3~3.8	500
WL-4	25.4	16.51	6.35	9.52	2.3~3.8	

