




SNAP BUSHING

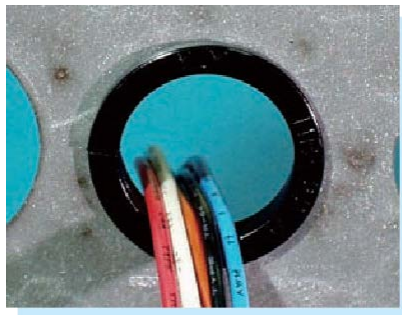

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm



MOUNTING HOLE




THICKNESS: E

PARTNO	A	B	C	D	E	PACKAGE
NB-07A	7.0	10.4	6.0	4.8	0.8~1.0	1000
NB-12A	12.7	16.2	10.8	5.2		
NB-16A	16.0	19.3	13.0	5.2		
NB-19A	19.0	23.0	15.6	5.5		
NB-21A	21.0	25.0	19.0	5.6		
NB-22A	22.0	25.8	19.3	5.5		
NB-23A	23.0	26.4	20.4	5.5		
NB-24A	24.0	27.0	20.8	5.3		
NB-27A	27.0	34.6	27.0	6.0		250
NB-29A	29.0	34.0	26.3	7.0		500
NB-30A	30.0	36.25	28.0	7.0		
NB-32A	32.0	36.9	30.0	6.7		

SNAP BUSHING



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm



MOUNTING HOLE


THICKNESS: E

PARTNO	A	B	C	D	E	PACKAGE
NB-22T	22.0	26.4	20.3	5.5	0.6~0.8	500
NB-25T	25.4	30.3	23.3	8.0	0.6~1.6	
NB-25TS	25.0	30.3	23.3	8.0		


SNAP BUSHING



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm



MOUNTING HOLE





THICKNESS: E

PARTNO	A	B	C	D	E	PACKAGE
NB-27C	27.0	34.6	27.0	6.0	0.8~1.2	500
NB-29C	29.0	34.6	27.0	7.0		
NB-32C	32.0	36.9	30.0	6.7		


SNAP BUSHING



- ◆ MATERIAL: NYLON 66 (UL)/POM
- ◆ FLAME CLASS: 94HB/94V-2/94V-0
- ◆ COLOR: NATURAL/WHITE/BLACK
- ◆ UNIT: mm



MOUNTING HOLE



PARTNO	A	B	C	D	PACKAGE
NC-28A	28.0	30.5	25.0	7.0	500

