
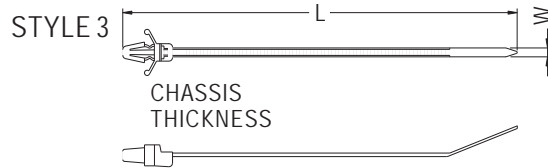
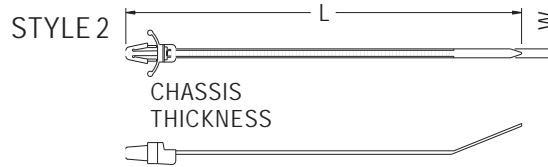



CABLE TIES


- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm
- ◆ UL RECOGNIZED

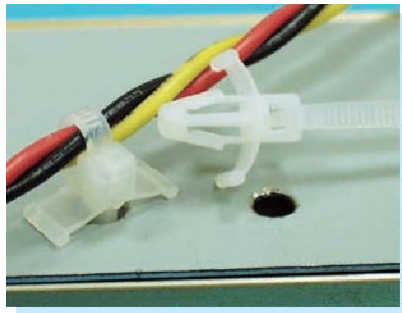


PART NO	APPROX LENGTH	APPROX WIDTH	MAX BUNDLE	MIN. LOOP TENSILE STRENGTH	Hole Diameter CHASSIS	Max. Panel THICKNESS	STYLE	PACKAGE
	mm(in)	mm(in)						
	L	W						
GTP-130ST	132(5.12)	4.8(0.19)	25(0.98)	22.2(50)	6.4(0.252)	3.2(0.126)	3	1000
GTP-170ST	175(6.69)		38(1.50)					
GTP-190ST	200(7.68)		45(1.77)					
GTP-110M	110(4.33)	2.5(0.10)	22(0.87)	8.1(18)	4.8~5.0 (0.189)~(0.197)	0.8~2.4 (0.03)~(0.09)	2	
GTP-110MA								
GTP-130I	130(5.12)	3.2(0.13)	28(1.10)	13.6(30)	4.0(0.157)	1.0~2.0	3	
GTP-150I	150(5.91)	3.6(0.14)	32(1.26)		5.2(0.205)	1.0~2.8	1	
GTP-200ST	200(7.87)	4.8(0.19)	46(1.81)	22.2(50)	6.3(0.248)	3.6(0.141)	1	
Re leasable Cable Tie								
GTRP-130I	130(5.12)	3.2(0.13)	28(1.10)	13.6(30)			3	1000

STRAP TIES

- ◆ MATERIAL: PE/NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

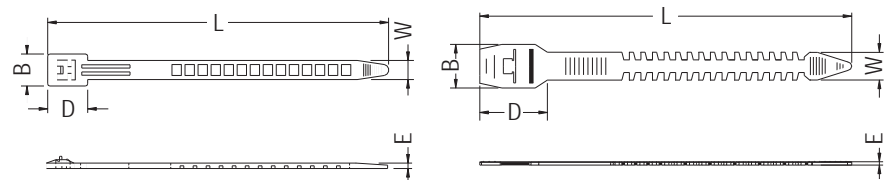

FOR ST-2, ST-3

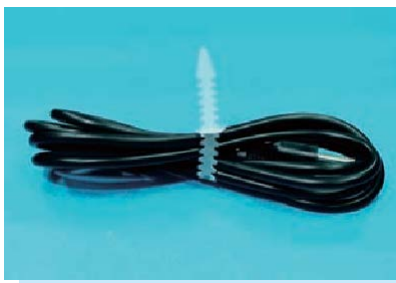

PART NO	B	D	E	L	W	PACKAGE
ST-1SN	15.0	18.3	1.0	157.0	8.6	500
ST-1	14.7	18.3	1.5	157.0	8.6	
ST-2	15.8	21.4	1.2	135.0	10.0	
ST-3	15.4	24.5	1.2	140.0	10.0	
ST-4	15.0	18.3	1.7	205.0	8.6	
ST-5	13.0	16.0	1.45	125.0	7.5	
ST-5NS	13.0	16.0	1.0	125.0	7.5	
ST-11N	15.0	18.3	1.7	300.0	8.6	

