


- ◆ MATERIAL:SUS316
- ◆ UNIT:mm

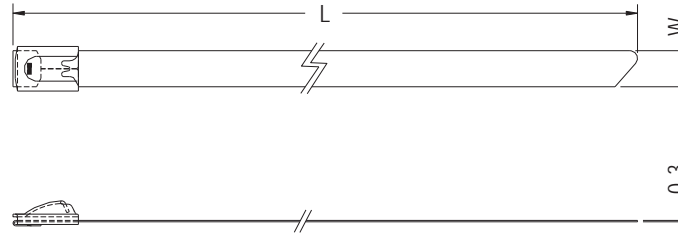

SELF-LOCKING TIES:

PART NO	MAX BUNDLE mm(in)	APPROX LENGTH mm(in)	APPROX WIDTH mm(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
STB-152S	25(1.00")	152(6.00")	4.5(0.177")	45.3(100)	100
STB-200S	50(2.00")	200(8.00")	4.5(0.177")	45.3(100)	100
STB-360S	102(4.00")	360(14.0")	4.5(0.177")	45.3(100)	100
STB-520S	152(6.00")	520(20.0")	4.5(0.177")	45.3(100)	100
STB-680S	203(8.00")	680(27.0")	4.5(0.177")	45.3(100)	100
STB-840S	254(10.0")	840(33.0")	4.5(0.177")	45.3(100)	100
STB-1050S	318(12.5")	1050(41.0")	4.5(0.177")	45.3(100)	50

PART NO	MAX BUNDLE mm(in)	APPROX LENGTH mm(in)	APPROX WIDTH mm(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
STB-152M	25(1.00")	152(6.00")	8.0(0.315")	113.3(250)	100
STB-200M	50(2.00")	200(8.00")	8.0(0.315")	113.3(250)	100
STB-360M	102(4.00")	360(14.0")	8.0(0.315")	113.3(250)	100
STB-520M	152(6.00")	520(20.0")	8.0(0.315")	113.3(250)	100
STB-680M	203(8.00")	680(27.0")	8.0(0.315")	113.3(250)	100
STB-840M	254(10.0")	840(33.0")	8.0(0.315")	113.3(250)	100
STB-1050M	318(12.5")	1050(41.0")	8.0(0.315")	113.3(250)	50

PART NO	MAX BUNDLE mm(in)	APPROX LENGTH mm(in)	APPROX WIDTH mm(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
STB-290L	80(3.10")	290(11.0")	12.0(0.472")	272.0(600)	50
STB-360L	102(4.00")	360(14.0")	12.0(0.472")	272.0(600)	50
STB-430L	121(4.70")	430(17.0")	12.0(0.472")	272.0(600)	50
STB-520L	152(6.00")	520(20.0")	12.0(0.472")	272.0(600)	50
STB-600L	175(6.80")	600(24.0")	12.0(0.472")	272.0(600)	50
STB-680L	203(8.00")	680(27.0")	12.0(0.472")	272.0(600)	50
STB-750L	230(8.70")	750(30.0")	12.0(0.472")	272.0(600)	50
STB-840L	254(10.0")	840(33.0")	12.0(0.472")	272.0(600)	50
STB-910L	273(10.7")	910(36.0")	12.0(0.472")	272.0(600)	25
STB-1000L	302(11.9")	1000(39.0")	12.0(0.472")	272.0(600)	25
STB-1070L	325(12.8")	1070(42.0")	12.0(0.472")	272.0(600)	25
STB-1200L	351(13.8")	1200(47.0")	12.0(0.472")	272.0(600)	25

