

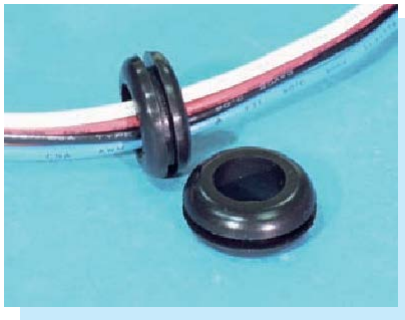





GROMMET





- ◆ MATERIAL: NBR/RUBBER/
SILICON RUBBER
- ◆ COLOR: BLACK
- ◆ UNIT: mm





MOUNTING HOLE





GM-16





GM-17





GM-35





GM-38, GM-46




GM-39




GM-40, GM-44




GM-45




GM-49




GM-55, GM-60, GM-65



GM-53



GM-64



GM-68

| PARTNO | A | B | C | D | E | PACKAGE |
|---------|-------|-------|------|------|------|---------|
| GM-1 | 8.0 | 4.8 | 3.2 | 1.6 | 6.4 | 2000 |
| GM-1A | 9.5 | 6.4 | 4.0 | 1.6 | 6.4 | |
| GM-2 | 10.8 | 8.0 | 4.5 | 1.6 | 4.5 | 1000 |
| GM-3 | 14.4 | 9.5 | 6.3 | 1.6 | 7.0 | |
| GM-3A | 14.2 | 11.0 | 8.0 | 1.6 | 4.8 | |
| GM-4 | 17.5 | 12.7 | 9.5 | 1.6 | 6.8 | |
| GM-5 | 22.0 | 17.5 | 14.2 | 1.6 | 4.8 | |
| GM-6 | 22.0 | 19.0 | 16.0 | 1.6 | 5.5 | 500 |
| GM-6A | 25.0 | 19.5 | 18.0 | 1.6 | 6.0 | 250 |
| GM-7 | 31.4 | 25.2 | 18.5 | 1.6 | 8.0 | |
| GM-8 | 19.5 | 14.0 | 6.0 | 1.0 | 7.0 | 1000 |
| GM-9 | 15.9 | 12.7 | 9.5 | 1.6 | 6.4 | |
| GM-11 | 7.9 | 4.8 | 3.2 | 1.6 | 4.8 | 2000 |
| GM-14NP | 17.46 | 11.11 | 7.94 | 2.38 | 8.73 | 1000 |
| GM-15 | 10.8 | 8.0 | 5.0 | 1.6 | 4.5 | |
| GM-16 | 18.0 | 14.7 | 7.0 | 4.2 | 18.0 | |
| GM-17 | 18.0 | 14.6 | 8.0 | 3.8 | 12.0 | |
| GM-18 | 13.0 | 8.4 | 5.5 | 3.3 | 6.3 | |
| GM-30 | 13.3 | 9.0 | 5.8 | 2.0 | 6.2 | |
| GM-35 | 8.0 | 6.0 | 3.4 | 1.0 | 3.0 | |
| GM-38 | 10.4 | 8.1 | 3.6 | 1.15 | 7.15 | |
| GM-39 | 10.5 | 7.5 | 5.2 | 1.4 | 5.5 | |
| GM-40 | 24.0 | 17.5 | 14.0 | 3.0 | 7.0 | |
| GM-42 | 27.0 | 20.8 | 12.7 | 1.6 | 7.8 | 250 |
| GM-43 | 11.0 | 7.9 | 4.7 | 1.6 | 6.0 | |
| GM-44 | 12.3 | 8.0 | 5.0 | 4.0 | 8.0 | 1000 |
| GM-45 | 16.0 | 9.5 | 6.2 | 2.0 | 7.0 | |
| GM-46 | 7.5 | 6.0 | 3.5 | 1.0 | 5.0 | |
| GM-47 | 17.5 | 13.5 | 10.0 | 2.0 | 7.0 | |
| GM-48 | 10.8 | 8.0 | 4.5 | 1.2 | 4.5 | |
| GM-49 | 7.8 | 5.8 | 2.33 | 0.8 | 4.0 | |
| GM-50 | 17.5 | 12.0 | 10.0 | 2.0 | 6.8 | |
| GM-51 | 12.0 | 9.0 | 6.5 | 1.5 | 5.5 | |
| GM-53 | 7.5 | 4.5 | 3.5 | 2.0 | 4.0 | |
| GM-55 | 7.0 | 6.0 | 3.5 | 1.0 | 5.0 | |
| GM-56 | 7.7 | 5.0 | 3.1 | 1.3 | 2.8 | |
| GM-57 | 8.8 | 6.0 | 4.1 | 2.5 | 7.0 | |
| GM-58 | 11.0 | 9.0 | 6.0 | 2.5 | 6.6 | |
| GM-60 | 7.0 | 6.0 | 3.5 | 1.0 | 3.0 | |
| GM-61 | 17.5 | 12.7 | 9.0 | 1.6 | 6.8 | |
| GM-62 | 17.5 | 12.7 | 8.6 | 1.6 | 6.8 | |
| GM-64 | 12.9 | 10.5 | 9.3 | 0.8 | 2.4 | |
| GM-65 | 24.0 | 18.0 | 14.0 | 3.0 | 7.0 | |
| GM-68 | 15.0 | 12.1 | 6.0 | 3.0 | 5.0 | |

