

▶ MINI JUMPER 1.27mm

Mini jumper 1.27mm E type

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



RoHS 2002/95/EC

Specifications

Current Rate: 1AMP | Min. Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ
 | Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 66 | Contact Pin: Phosphor Bronze | Plating: Gold Flash all over



www.toptek-co.com



▶ ORDER INFORMATION

M J 3 P - X G X - L


P= Phosphor Bronze

A= Close 3.0mm
 D= With Handle 5.5mm
 E= Multi-Post

G= Gold Flash


B= Black Insulator
 U= Blue Insulator
 G= Gray Insulator
 Y= Yellow Insulator
 R= Red Insulator
 E= Green Insulator
 W= White Insulator

L= RoHS + PBT

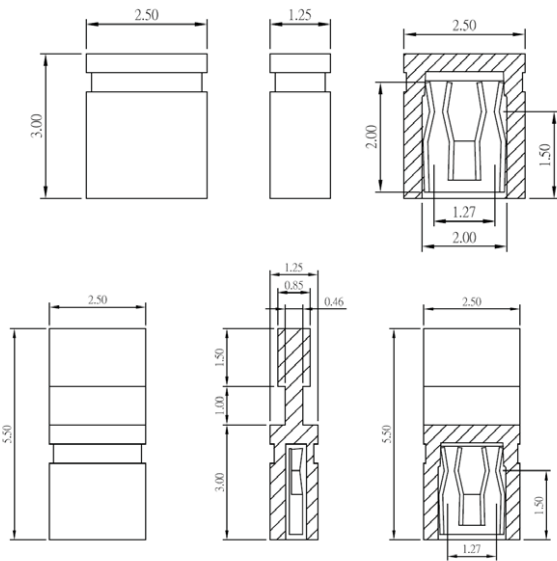

A Type

D Type

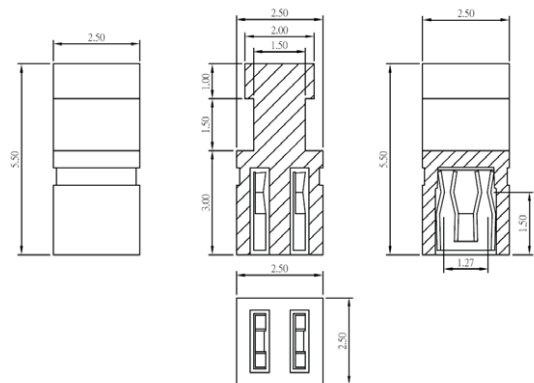

E Type