
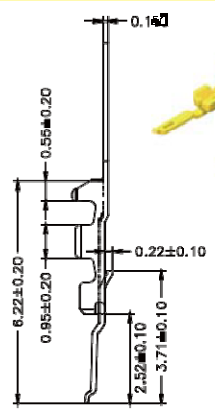
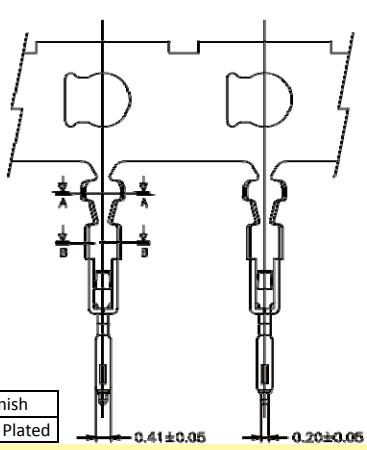




1.0mm Terminal / Housing

Specifications
 Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 46, UL94V-0










Wire Range	Insulation O.D.	Material	Finish
#28-#36	0.50mm(Max)	Phosphor Bronze	Gold Plated

Part No.:1002-T-L

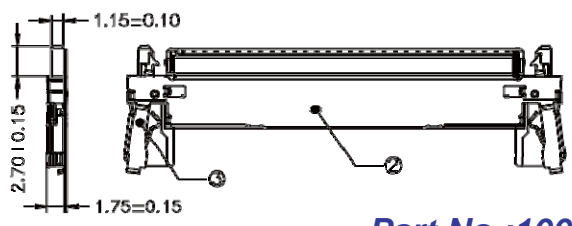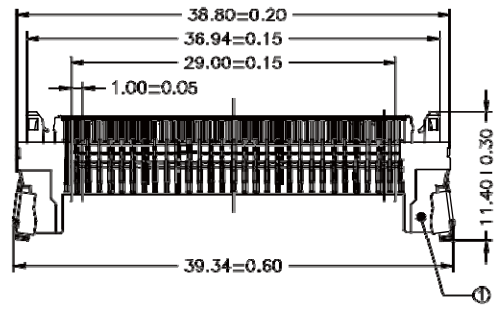

Part No.:1004H-30W-U

1.0mm Terminal / Housing

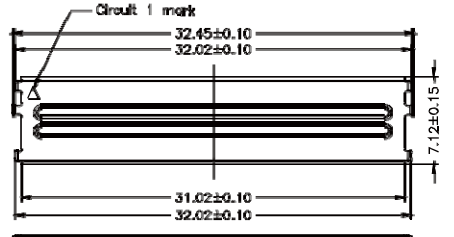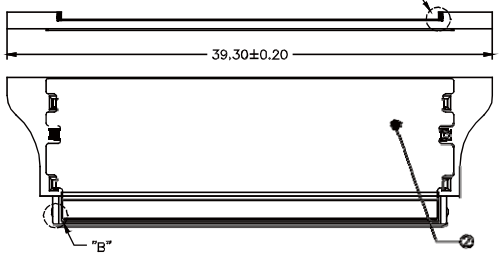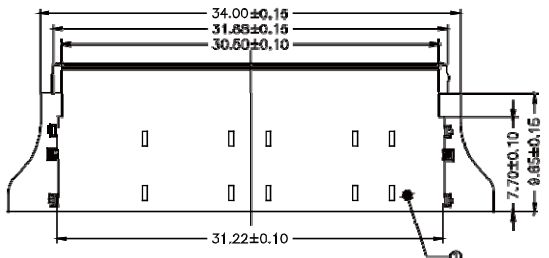

No.	Description	Material	Color
1	Insulator	Nylon 46,UL94V-0	Natural(Beige)
2	Ground plate	Stainless	—
3	Top cover	Stainless	—

Part No.:1010H-30W-L