Housing Wafer Terminal

1.25mm Wafer SMT Straight / SMT R/A / Right Angle / Straight Type

Specifications
Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 500V AC/minute
Terminal: Brass / Gold & Tin Plated
Solder Tabs: Phosphor Bronze / Gold Plated
Material: Housing: Nylon 66, UL94V-0
Wafer: Nylon 6T, UL94V-0

No. of Contacts	Dimensions		
	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

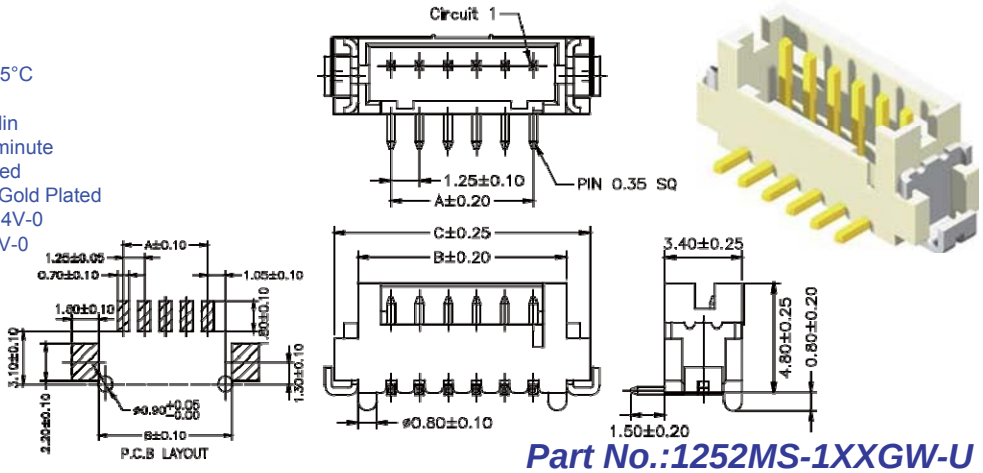

Part No.:1252MS-1XXGW-U

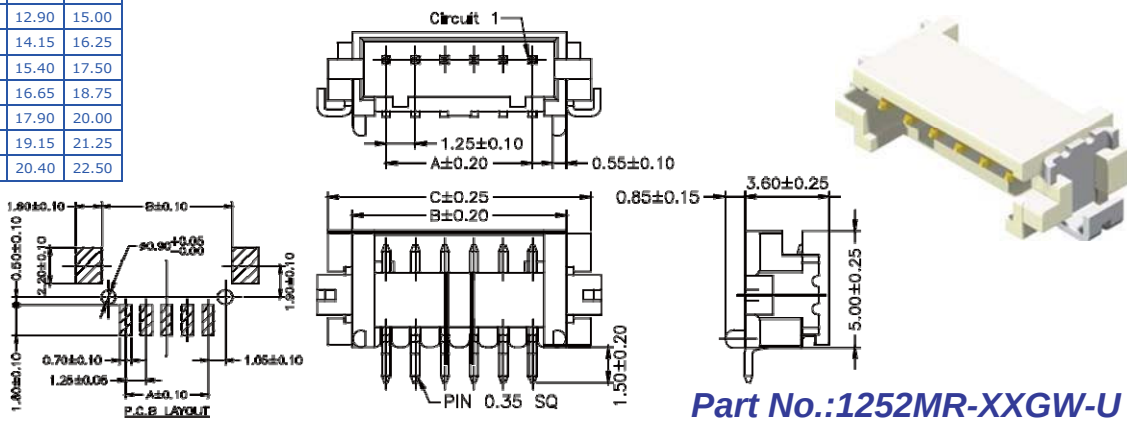

Part No.:1252MR-XXGW-U

No. of Contacts	Dimensions	
	A	B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

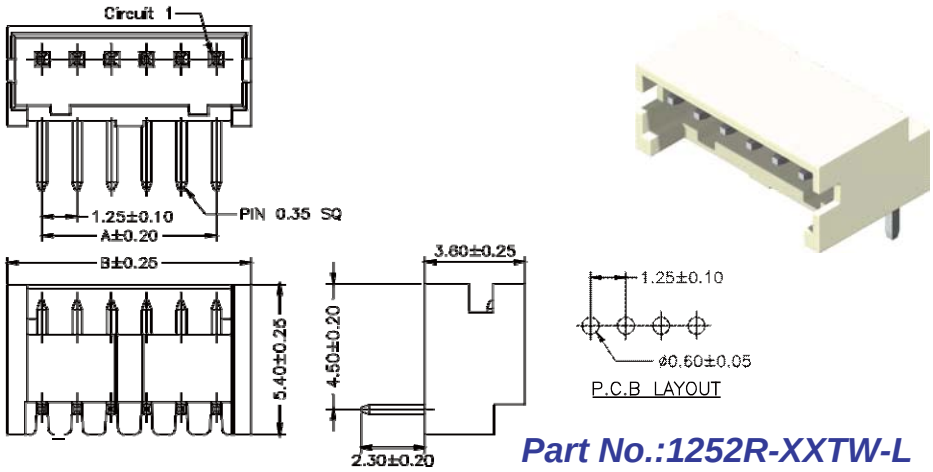

Part No.:1252R-XXTW-L

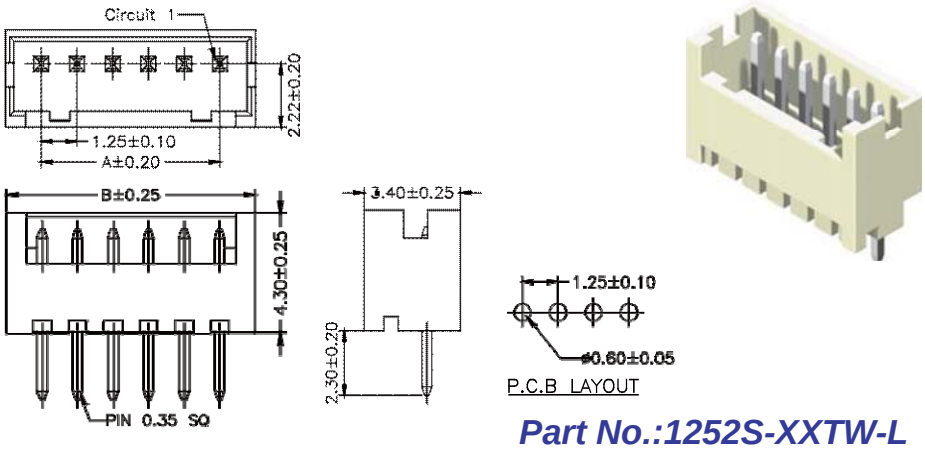

Part No.:1252S-XXTW-L