



1.27mm Wafer Straight

Specifications

Current Rating: 2.4A AC,DC

Temperature Range: -40°C to +105°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 1000Ω Min




Withstanding Voltage: 500V AC/minute

Terminal: Brass / Tin Plated

Material: P.B.T & Nylon 6T, UL94V-0



No. of Contacts	Dimensions			
	A	B	C	D
4	8.86	6.11	3.81	7.41
6	11.40	8.65	6.35	9.95
8	13.94	11.19	8.89	12.49
10	16.48	13.73	11.43	15.03
12	19.02	16.27	13.97	17.57
14	21.56	18.81	16.51	20.11
16	24.10	21.35	19.05	22.65
18	26.64	23.89	21.59	25.19
20	29.18	26.43	24.13	27.73
22	31.72	28.97	26.67	30.27
24	34.26	31.51	29.21	32.81
26	36.80	34.05	31.75	35.35

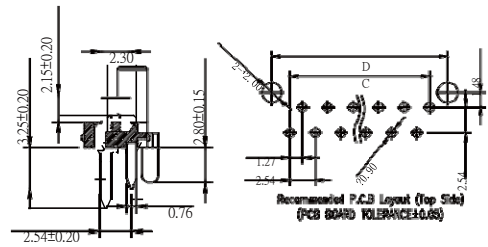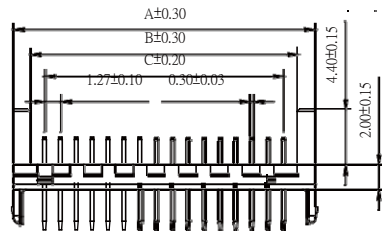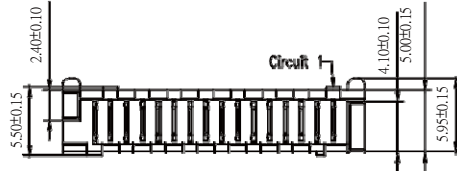

Part No.:1271S-XXTB-U