
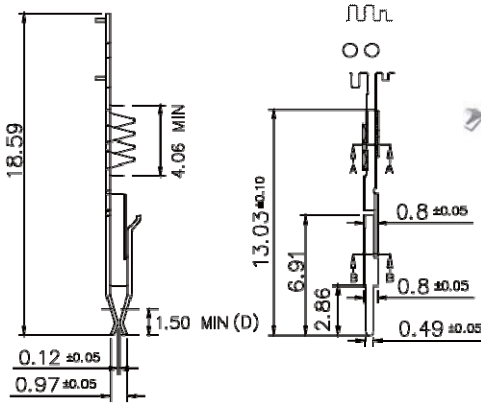


## 1.27mm Female & Male Terminal / Housing


**Specifications**

Current Rating: 2A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C to +85°C  
Insulation Resistance: 1000MΩ Min  
Material: Nylon 66, UL94V-0

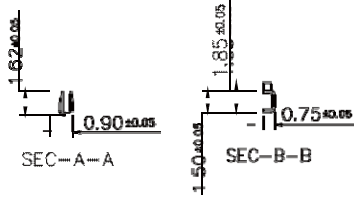

Material	Finish
Phosphor Borzne	Tin Plated


**Part No.:1272-FT-L**

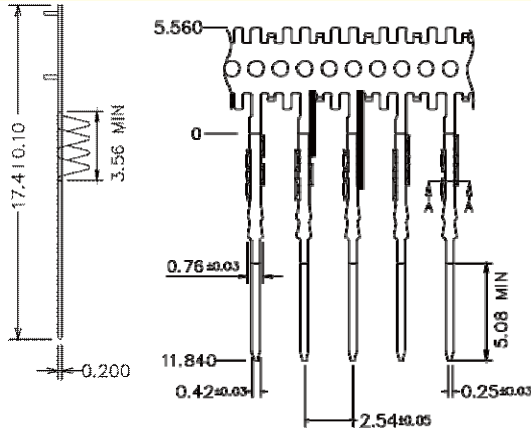


Material	Finish
Phosphor Borzne	Tin Plated

**Part No.:1272-MT-L**

No. of Contacts	Dimensions	
	A	B
2	1.27	3.61
3	2.54	4.88
4	3.81	6.15
5	5.08	7.42
6	6.35	8.69
7	7.62	9.96
8	8.89	11.23
9	10.16	12.50
10	11.43	13.77
11	12.70	15.04
12	13.97	16.31
13	15.24	17.58
14	16.51	18.85
15	17.78	20.12
16	19.05	21.39
17	20.32	22.66
18	21.59	23.93
19	22.86	25.20
20	24.13	26.47
21	25.40	27.74
22	26.67	29.01
23	27.94	30.28
24	29.21	31.55
25	30.48	32.82
26	31.75	34.09
27	33.02	35.36
28	34.29	36.63
29	35.56	37.90
30	36.83	39.17

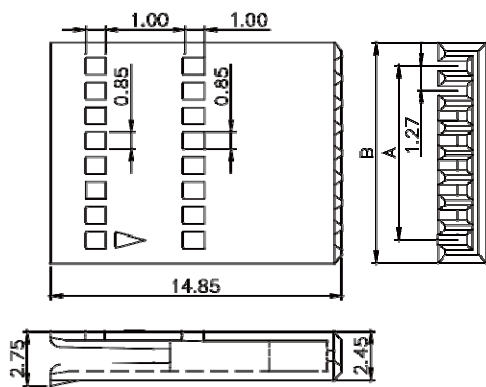

**Part No.:1272H-XXBA-L**

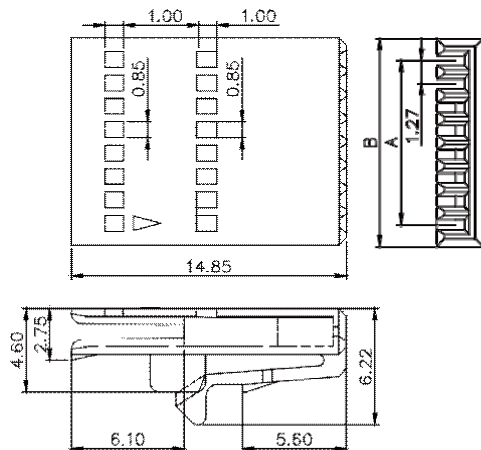

**Part No.:1272H-XXBB-L**