

▶ TERMINAL BLOCK

PCB Terminal block (carrello)



TOPTTEK®
HARDWARE ELECTRONIC COMPONENTS






SPECIFICATION MODEL KF128G P.5.08 :

1	Screw Material	M2.5 steel, Zinc plated, "-" slot type
2	Housing Material	PA66, UL94V-0
3	Clamp Material	Brass, Ni plated
4	Pin Header Material	Brass, Tin plated
5	Rated voltage	UL: 300V IEC: 250V
6	Rated Current	UL: 15A IEC: 24A
7	Insulation Resistance	500MΩ / DC500V
8	Withstanding Voltage	AC2000V / 1min
9	Wire Range	24-14AWG 2.5mm ²
10	Operating Temperature	-40°C.....+105°C
11	Soldering Temperature	250°C ± 5 / 5sec
12	Torque	0.4N.m (3.54Lb.in)
13	Strip Length	6-7mm



▶ ORDER INFORMATION

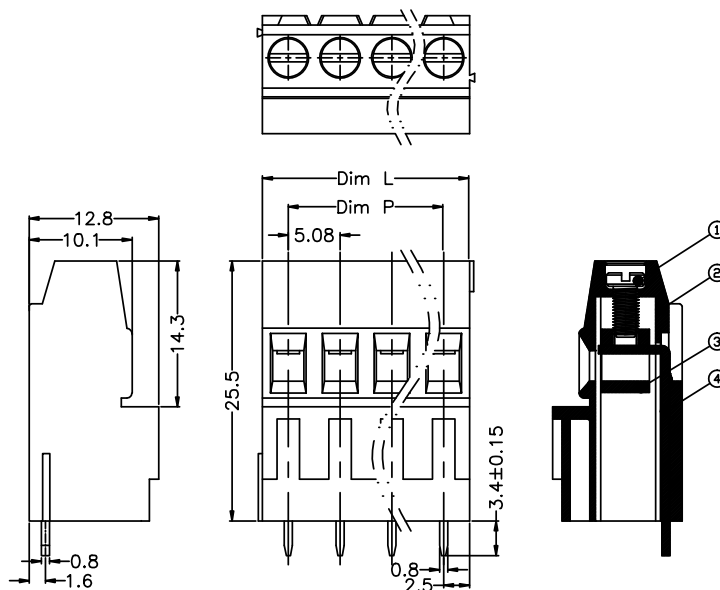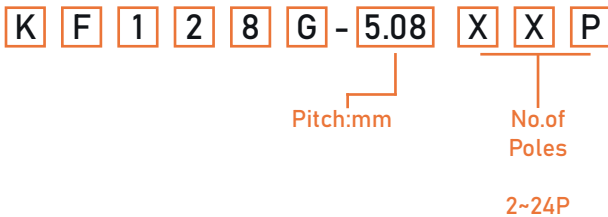

N=Number of Poles
Dim P=(N-1)x5.08
Dim L=Nx5.08

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40