

# CONNECTOR MANUFACTURERS


Rating: 20A 125VAC ; 16A 250VAC  
 Contact Resistance: 35m Ω max  
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute  
 Operating Temperature: -25°C~ +85°C  
 Electrical Life: ≥ 10,000 Cycles

**TOPTek**<sup>®</sup>  
 HARDWARE ELECTRONIC MANUFACTURER


 www.toptek-co.com

## A-TOP2-2101/2101N

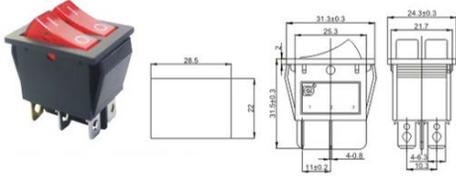


A-TOP2-2101 ON-OFF 4P  
 A-TOP2-2101N ON-OFF 6P

## A-TOP2-201N

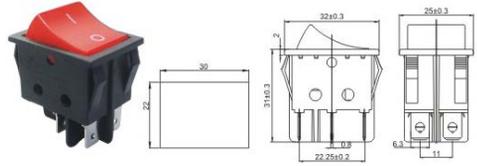


A-TOP2-201N ON-OFF W/o Light

## A-TOP2-2101EN

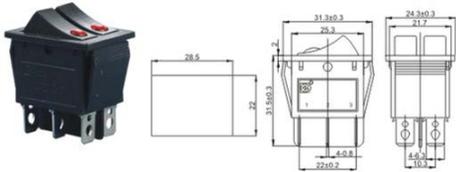


A-TOP2-2101EN ON-OFF

## A-TOP2-2-201EN

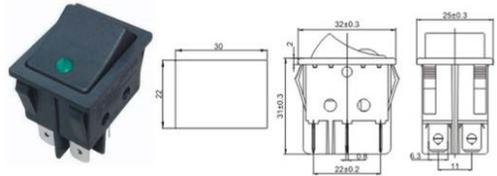


A-TOP2-2-201EN ON-OFF

## A-TOP2-04

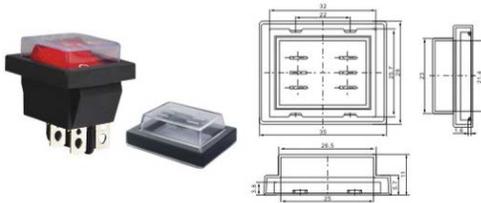


A-TOP2-04

## A-TOP2-2-202/202N

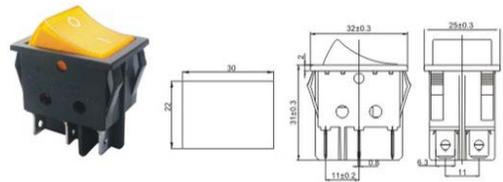


A-TOP2-2-202 ON-ON  
 A-TOP2-2-202N ON-ON

## A-TOP2-201W/201NW

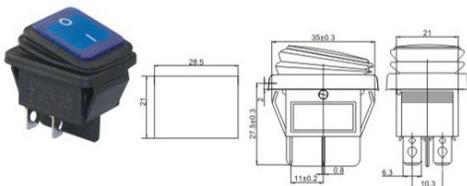

A-TOP2-201W ON-OFF  
 A-TOP2-201NW ON-OFF

## A-TOP2-2-201NS

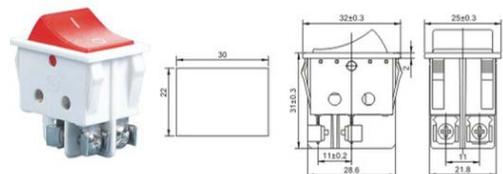

A-TOP2-2-201NS ON-OFF