TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER
www.toptek-co.com

Contact Resistance: ≤ 0.03 Ω
Insulation Resistance: ≥ 100M Ω
Withstand Voltage: 500V, AC/minute
Temperature Range: -25°C ~ +70°C

Rated Load: 30V DC 0.3A
Insertion and Extraction Force: 3N ~ 30N
Terminal Strength: ≥ 20N
Life: ≥ 5000 Cycles

R-324

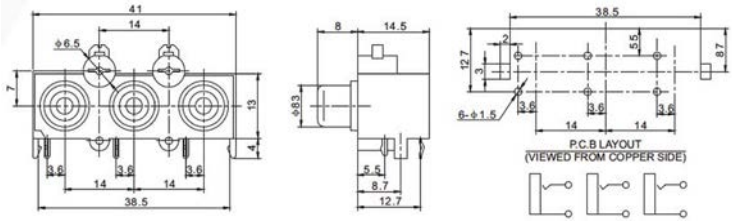

R-326H

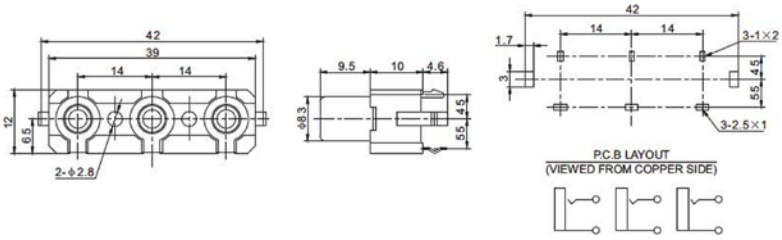

R-327HK

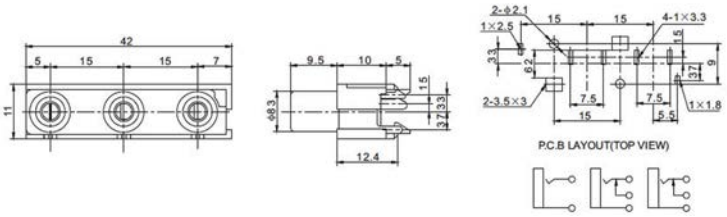

R-328

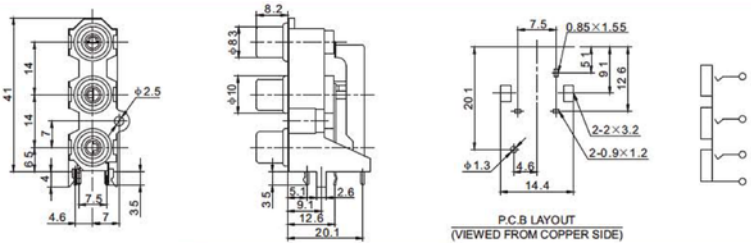

R-330

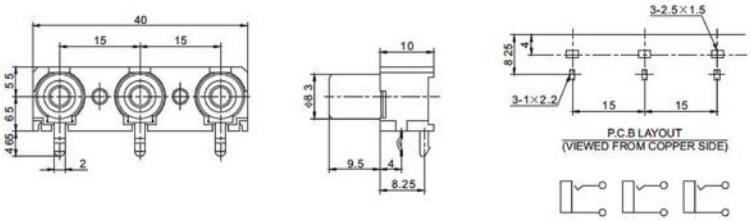

RCA Series

RoHS