




CONNECTOR MANUFACTURERS

Contact Resistance: $\leq 0.03 \Omega$
 Insulation Resistance: $\geq 100M \Omega$
 Withstand Voltage: 500V, AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$




Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
 Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
 Terminal Strength: $\geq 20\text{N}$
 Rated Load: 30V DC 0.3A
 Life: ≥ 5000 Cycles






R-DIN-107A



R-DIN-301K



R-DIN-301KA

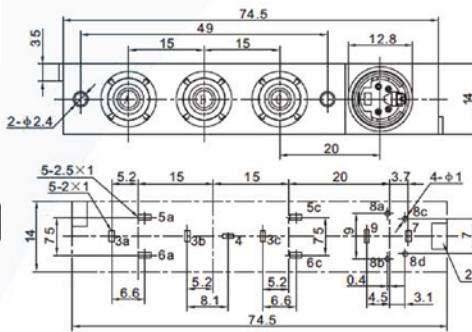

R-DIN-302K

