


# CONNECTOR MANUFACTURERS




Contact Resistance:  $\leq 0.05 \Omega$   
 Insulation Resistance:  $\geq 100M \Omega$   
 Withstand Voltage: 500V, AC/minute  
 Temperature Range:  $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Insertion and Extraction Force: 5N ~ 30N (RCA Jack)  
 Insertion and Extraction Force: 11N ~ 88N (CS (Jack))  
 Rated Load: 40V AC, 0.5A (RCA Jack)  
 Rated Load: 250V AC, 3A (CS (Jack))  
 Life:  $\geq 5000$  Cycles

## R-CS-01

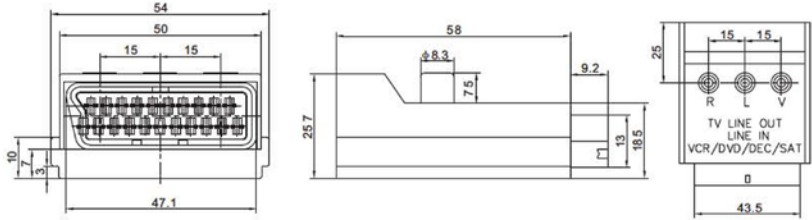

## R-CS-02

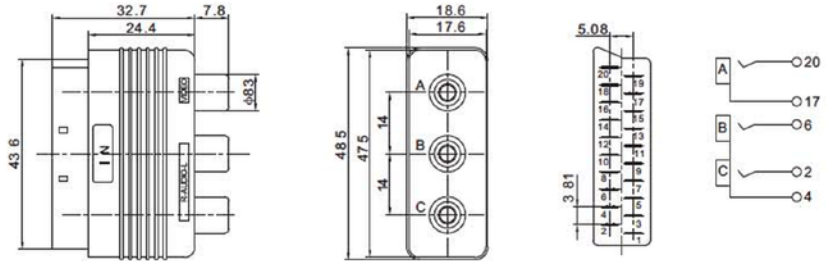

## R-CS-03

