


Contact Resistance: $\leq 0.05 \Omega$
 Insulation Resistance: $\geq 100M \Omega$
 Withstand Voltage: 500V, AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Insertion and Extraction Force: 5N ~ 30N (RCA Jack)
 Insertion and Extraction Force: 11N ~ 88N (CS Jack)
 Rated Load: 40V AC, 0.5A (RCA Jack)
 Rated Load: 250V AC, 3A (CS Jack) Life: ≥ 5000 Cycles




R-CS-03A

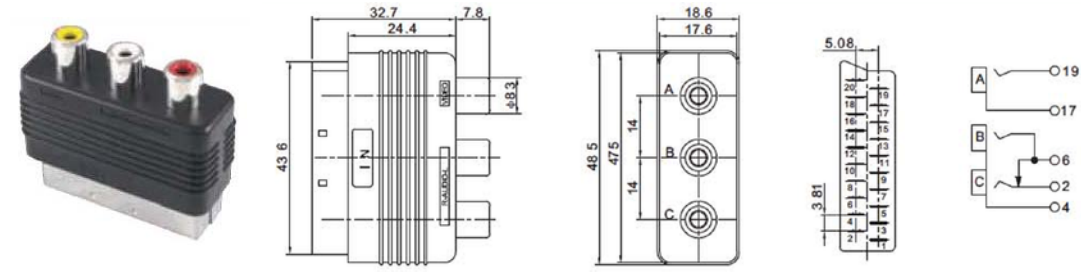

7
*
55

R-CS-04

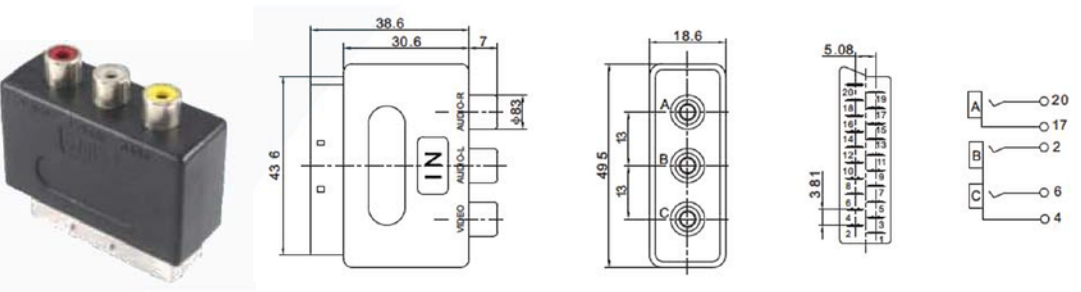

R-CS-04A

