


2.54mm Terminal / Housing

Specifications


Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Insulation Resistance: 1000MΩ Min
Material: Nylon 66, UL94V-0

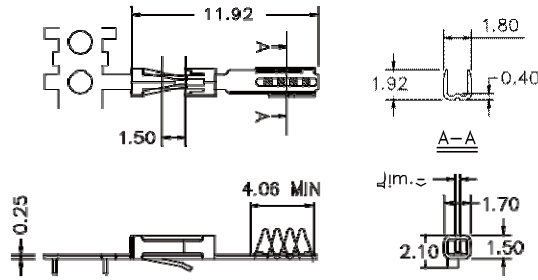



Using In	Material	Finish	Dim. A
02P~15P	Phosphor Borntze	Tin Plated	0.25
16P~28P			0.40

Part No.:2550-FT-B-L

No. of Contacts	Dimensions	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20

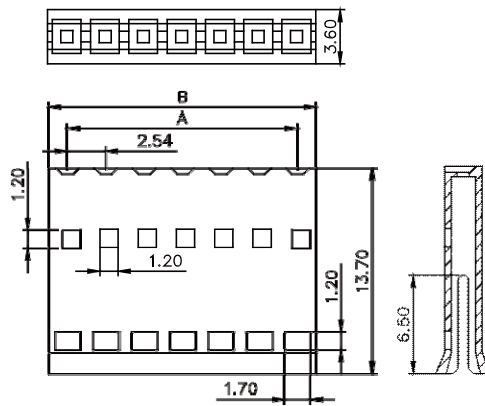

Part No.:2550H-XXBG-L


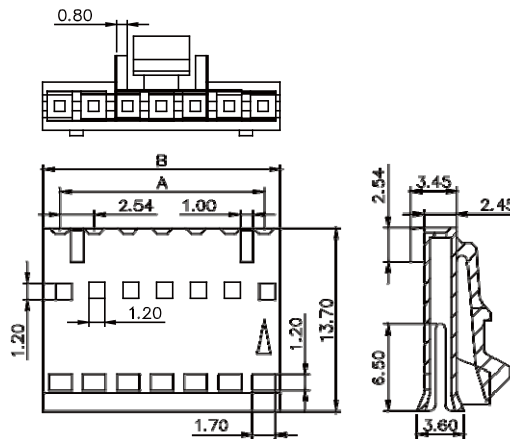


Part No.:2550H-XXBH-L

2.54mm Housing IDC Type

Specifications

Voltage Rating: 15V AC,DC
Temperature Range: -60°C to +105°C
Withstanding Voltage: 1000V AC/minute
Withstanding Humidity: 30% ~ 90%
Terminal: Phosphor Bronze / Tin Plated
Material: Nylon 66, UL94V-0

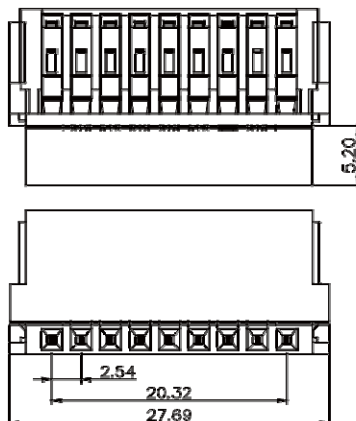

Part No.:2551IDC-XXTU-L