



2.54mm Terminal / Housing

Specifications
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -55°C to +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Material:P.B.TUL94V-0

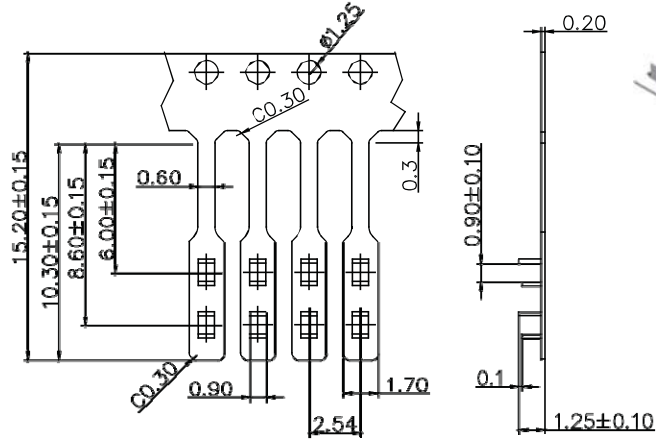

Material	Finish
Phosphor Bornze	Tin Plated


Part No.:2550-T-L

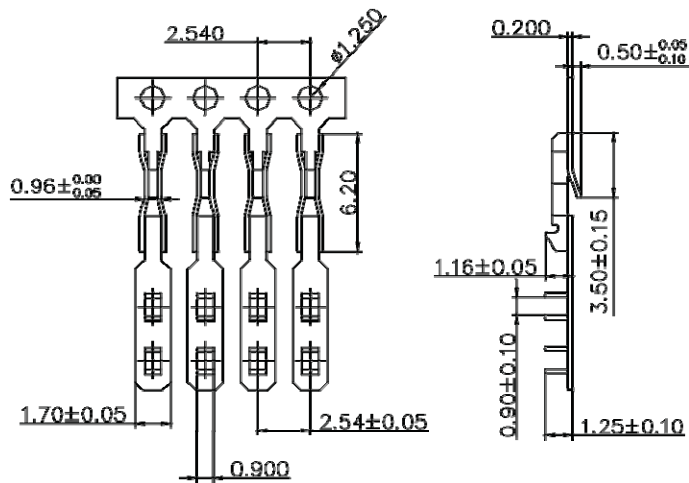

Material	Finish
Phosphor Bornze	Tin Plated

Part No.:2550-FT-L

No. of Contacts	Dimensions		No. of Contacts	Dimensions	
	A	B		A	B
2	2.54	5.08	15	35.56	38.10
3	5.08	7.62	16	38.10	40.64
4	7.62	10.16	17	40.64	43.18
5	10.16	12.70	18	43.18	45.72
6	12.70	15.24	19	45.72	48.26
7	15.24	17.78	20	48.26	50.80
8	17.78	20.32	21	50.80	53.34
9	20.32	22.86	22	53.34	55.88
10	22.86	25.40	23	55.88	58.42
11	25.40	27.94	24	58.42	60.96
12	27.94	30.48	25	60.96	63.50
13	30.48	33.02	26	63.50	66.04
14	33.02	35.56			

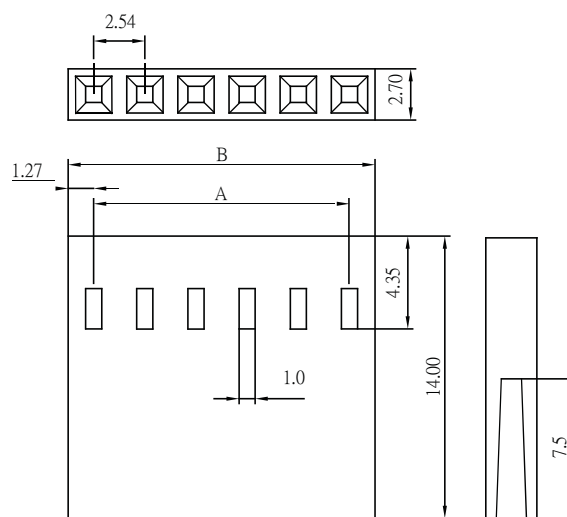

Part No.:2550H-XXB-L