

# MACHINE PIN SOCKET

## Machine Pin Socket Straight Type 2.54mm

**TOPTTEK**<sup>®</sup>

HARDWARE ELECTRONIC COMPONENTS

### Specifications

Current Rate: 3 AMP | Insulation Resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$  | Contact Resistance:  $\leq 4\text{m}\Omega/\text{Contact}$  | Dielectric Voltage: 1000V AC for one minute | Operation Temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$

### Material


Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Selective Gold





RoHS 2002/95/EC



www.toptek-co.com

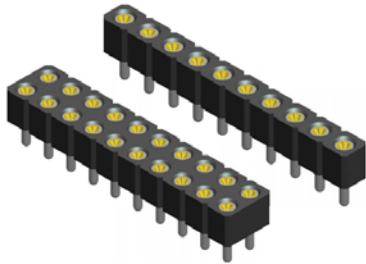

## ORDER INFORMATION

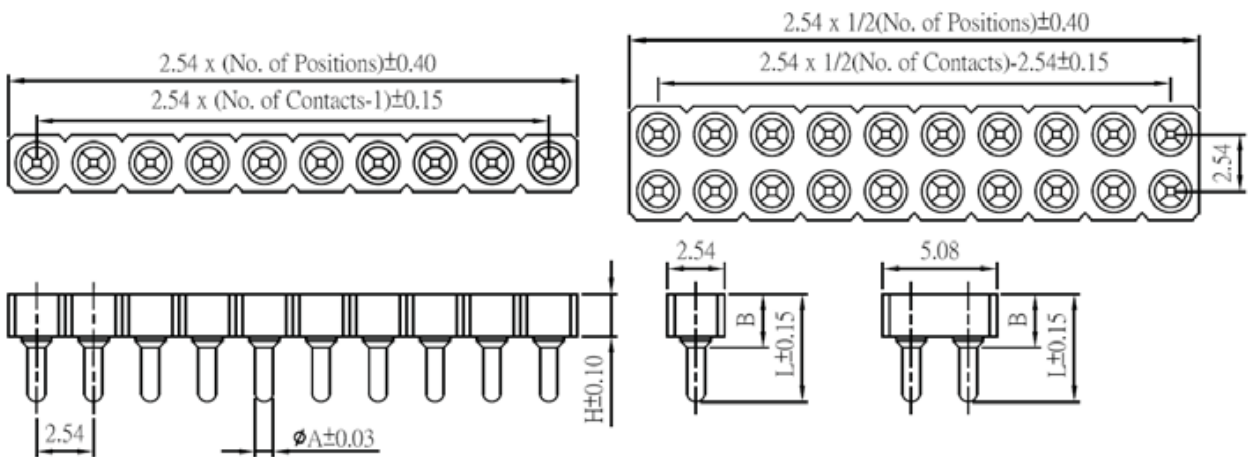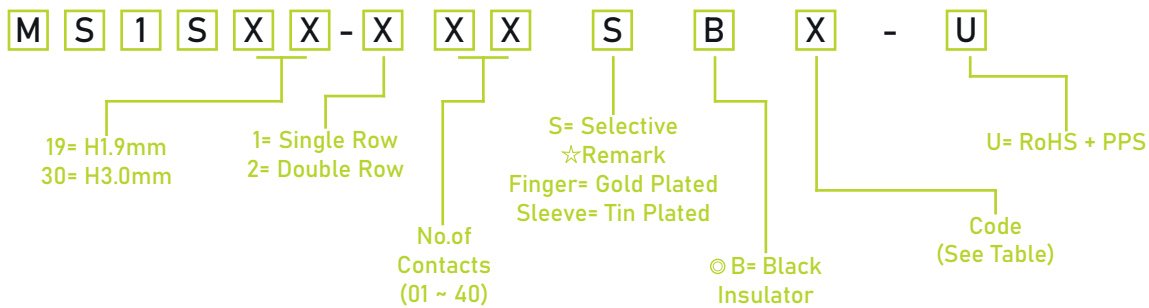

Code	Dim. H	Dim. L	Dim. A	Dim. B
482	1.90	4.82	0.79	2.65
540	3.00	5.40	0.75	3.10