



STRAIN RELIEF BUSHING  
2P-4

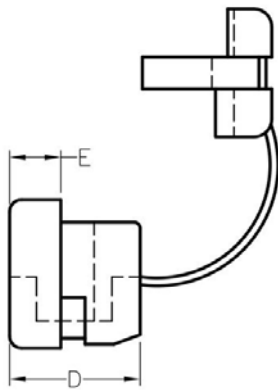

MOUNTING HOLE  
CHASSIS THICKNESS F

	PART NO	A	B	C	D	E	F	PACKAGE
	2P-4	9.5	8.7	10.4	10.4	4.0	1.6	1000
	3P-4	11.0	9.9	11.5	10.4	4.0	1.6	1000
	3W-1	11.0	9.9	11.5	10.4	4.0	2.5	1000
	4N-4	12.7	11.8	13.3	10.4	4.0	1.6	1000
	4N-4	13.1	11.8	13.3	10.4	4.0	1.6	1000
	4K-4	12.7	11.8	13.3	10.5	4.0	2.5	1000
	4K-4	13.1	11.8	13.3	10.5	4.0	2.5	1000
	5N-4	12.7	11.5	13.5	10.9	4.2	1.6	1000
	5N-4	13.1	11.5	13.5	10.9	4.2	1.6	1000
	5P-4	12.7	11.5	13.5	10.9	4.2	2.5	1000
	6N-4	15.9	14.0	16.8	14.8	5.6	1.6	500

---

6P-4	15.9	14.0	16.8	14.8	5.6	3.2	500
6N3-4	15.9	14.0	16.2	15.0	5.6	1.6	500
6P3-4	15.9	14.0	16.2	14.8	5.7	3.2	500
7N-2	19.0	16.5	19.5	19.1	7.8	1.6	100
7N-2	19.8	16.5	19.5	19.1	7.8	1.6	100
7P-2	19.0	16.5	19.5	19.4	7.8	3.2	100
7P-2	19.8	16.5	19.5	19.4	7.8	3.2	100
5P-4	13.1	11.5	13.5	10.9	4.2	2.5	1000

---

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : BLACK

UNIT : mm

Application : To fix and protect power cables from scraped by outlet, and avoid short-circuit.

MATERIAL 1 : NYLON 66(UL)

FLAME CLASS 1 : 94V-2

COLOR 1 : BLACK

Note: <none>

Note: <none>