

SWITCH LIGHT LED

8.5X8.5 Led type


TOPTTEK[®]
HARDWARE ELECTRONIC COMPONENTS



SPECIFICATION MODEL: T8511-X-X

www.toptek-co.com

1	Operating Temperature	-25°C to +85°C
2	Rating	50mA, 30V DC
3	Insulation Resistance	100MΩ min. 250V DC
4	Dielectric Strength	AC250V (50-60Hz) for 1 min.
5	Contact Resistance	500mΩ max.
6	Life	100.000 Cycles Min
7	Operating Force	F:200gf ± 50gf
8	Travel	0.25 ± 0.1mm






ORDER INFORMATION

T 8 5 1 1 - X - F

Led Color
N= Without
R= Red
Y= Yellow
G= Green
U= Blue
W= White
O= Orange
R/U= Red/Blue

Operating Force
F= 200gf

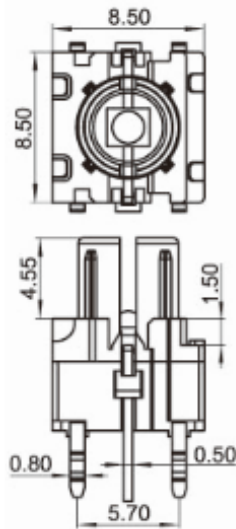

Color	VR	IF	Recommended Operating	IF	
				Nom	Max
White	DC5V	20mA	20mA	3.0V	3.6V
Red	DC5V	20mA	20mA	1.7V	2.4V
Yellow	DC5V	20mA	20mA	1.9V	2.4V
Blue	DC5V	20mA	20mA	3.0V	3.6V
Green	DC5V	20mA	20mA	1.9V	2.4V

