

# MACHINE PIN SOCKET

Machine Pin Socket IC SMT Type 2.54mm

**TOPTTEK**<sup>®</sup>

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS  
2002/95/EC

## Specifications



Current Rate: 3 AMP | Insulation Resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$  | Contact Resistance:  $\leq 4\text{m}\Omega/\text{Contact}$  | Dielectric Voltage: 60V AC for one minute | Operation Temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$

## Material

Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Gold Plated

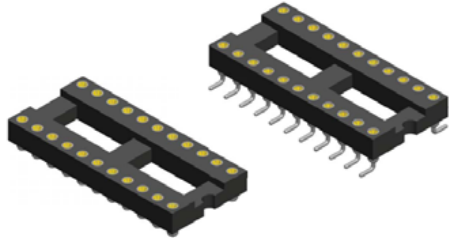

## ORDER INFORMATION

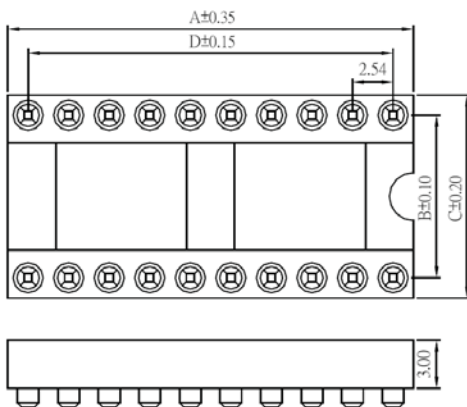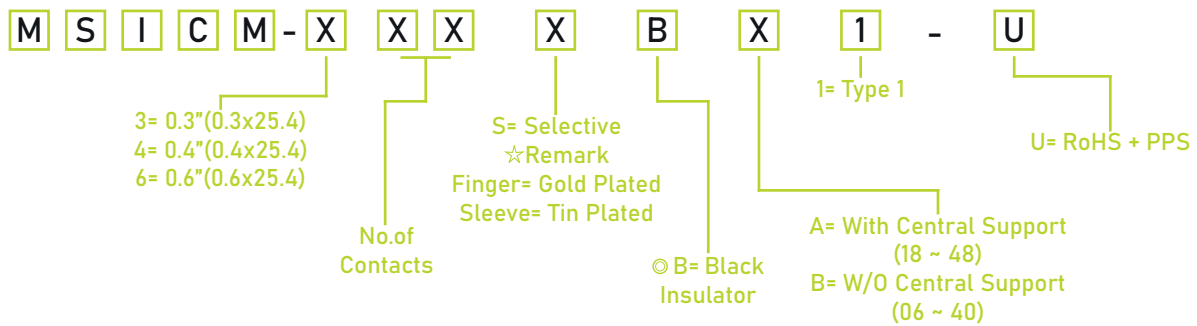

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
6	7.60	7.62	10.20	5.08	20	25.40	10.16	12.60	22.86
8	10.10	7.62	10.20	7.62	22	27.80	10.16	12.60	25.40
10	12.60	7.62	10.20	10.16	24	30.40	10.16	12.60	27.94
14	17.70	7.62	10.20	15.24	28	35.50	10.16	12.60	33.02
16	20.30	7.62	10.20	17.78	32	40.60	10.16	12.60	38.10
18	22.80	7.62	10.20	20.32	24	30.50	15.24	17.70	27.94
20	25.30	7.62	10.20	22.86	28	35.50	15.24	17.70	33.02
22	27.80	7.62	10.20	25.40	32	40.60	15.24	17.70	38.10
24	30.40	7.62	10.20	27.94	36	45.70	15.24	17.70	43.18
28	35.50	7.62	10.20	33.02	40	50.80	15.24	17.70	48.26
					42	53.30	15.24	17.70	50.80
					48	60.90	15.24	17.70	58.42

