

# MACHINE PIN HEADER




## Specifications

Current Rate: 1 AMP | Insulation Resistance:  $\geq 1000\text{M}\Omega$  at V=100V | Contact Resistance:  $\leq 4\text{m}\Omega$ /Contact | Dielectric Voltage: 1000V AC for one minute | Operation Temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

## Material

Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Gold Plated

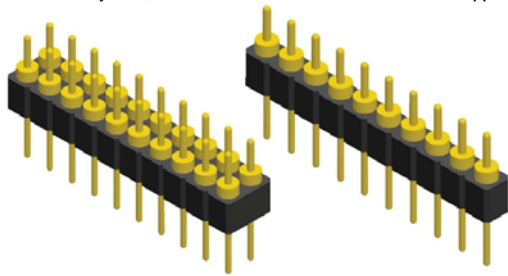

## ORDER INFORMATION

