

CONNECTOR MANUFACTURERS


Rating: 20A 125VAC ; 16A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: ≥ 10,000 Cycles

TOPTek[®]
 HARDWARE ELECTRONIC MANUFACTURER


 www.toptek-co.com

A-TOP2-2101/2101N

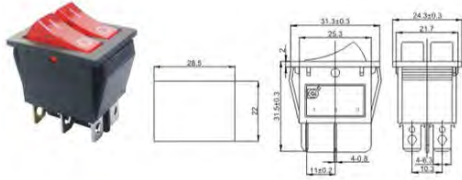


A-TOP2-2101 ON-OFF 4P
 A-TOP2-2101N ON-OFF 6P

A-TOP2-201N-X

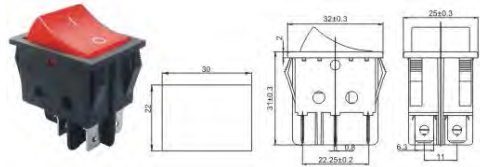


A-TOP2-201N-X ON-OFF W/o Light

A-TOP2-2101EN

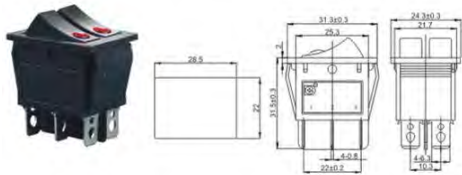


A-TOP2-2101EN ON-OFF

A-TOP2-2-201EN

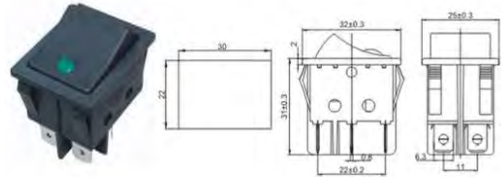


A-TOP2-2-201EN ON-OFF

A-TOP2-04

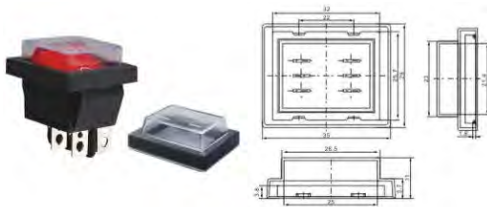


A-TOP2-04

A-TOP2-2-202/202N

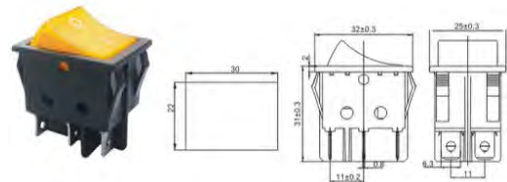


A-TOP2-2-202 ON-ON
 A-TOP2-2-202N ON-ON

A-TOP2-201W/201NW

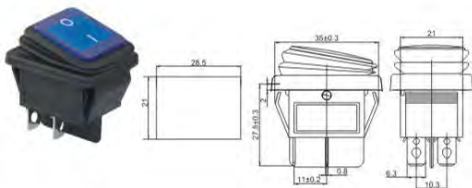

A-TOP2-201W ON-OFF
 A-TOP2-201NW ON-OFF

A-TOP2-2-201NS

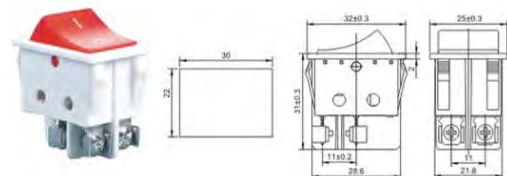

A-TOP2-2-201NS ON-OFF