

Ø 16 mm

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER



## E-TOP-16F-11E



Diameter: Ø 16mm  
Color: R, G, Y, O, B, W  
Switch Rating: 3A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:


- Momentary
- Maintained

The Front Shape: Flat

Lamp type: Ring illuminated (LED)

The Crust Material: Stainless steel

IP Degree: IP67, IK10

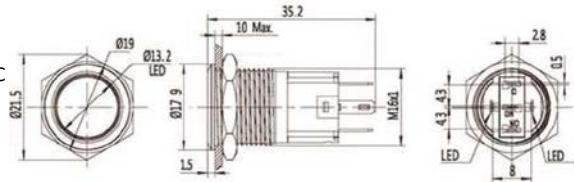

## E-TOP-16H-11E



Diameter: Ø 16mm  
Color: R, G, Y, O, B, W  
Switch Rating: 3A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:


- Momentary
- Maintained

The Front Shape: High

Lamp type: Ring illuminated (LED)

The Crust Material: Stainless steel

IP Degree: IP67, IK10

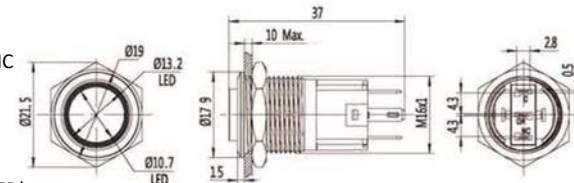

## E-TOP-16F-11D



Diameter: Ø 16mm  
Color: R, G, Y, O, B, W  
Switch Rating: 3A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:


- Momentary
- Maintained

The Front Shape: Flat

Lamp type: Dot illuminated (LED)

The Crust Material: Stainless steel

IP Degree: IP67, IK10

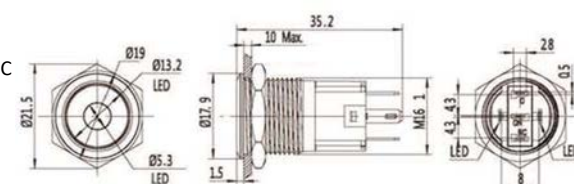

## E-TOP-16H-11D



Diameter: Ø 16mm  
Color: R, G, Y, O, B, W  
Switch Rating: 3A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:

- Momentary
- Maintained

The Front Shape: High

Lamp type: Dot illuminated (LED)

The Crust Material: Stainless steel

IP Degree: IP67, IK10

