

Ø 19 mm

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

## C-TOP-19F-E




Diameter: Ø 19mm  
 Color: R, G, Y, O, B, W  
 Switch Rating: 5A/250VAC  
 Contact Configuration: 1NO 1NC/ 2NO 2NC  
 Operation Type: Momentary  
 • Maintained(Z)  
 The Front Shape: Flat  
 Lamp type: Ring illuminated(LED)  
 The Crust Material:  
 • Stainless steel  
 • Copper plating  
 IP Degree: IP67, IK10

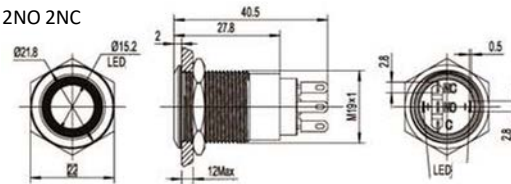

## C-TOP-19F-D




Diameter: Ø 19mm  
 Color: R, G, Y, O, B, W  
 Switch Rating: 5A/250VAC  
 Contact Configuration: 1NO 1NC/ 2NO 2NC  
 Operation Type: Momentary  
 • Maintained(Z)  
 The Front Shape: Flat  
 Lamp type: Dot illuminated(LED)  
 The Crust Material:  
 • Stainless steel  
 IP Degree: IP67, IK10

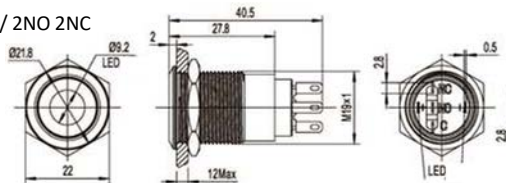

## C-TOP-19B-E




Diameter: Ø 19mm  
 Color: R, G, Y, O, B, W  
 Switch Rating: 5A/250VAC  
 Contact Configuration: 1NO 1NC/ 2NO 2NC  
 Operation Type: Momentary  
 • Maintained(Z)  
 The Front Shape: Ball  
 Lamp type: Ring illuminated(LED)  
 The Crust Material:  
 • Stainless steel  
 • Copper plating  
 IP Degree: IP67, IK10

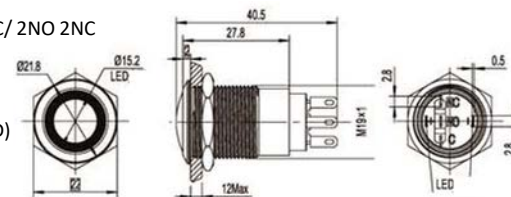

## C-TOP-19BS-10EM



Diameter: Ø 19mm  
 Color: R, G, Y, O, B, W  
 Switch Rating: 5A/250VAC  
 Contact Configuration: 1NO  
 Operation Type: Momentary  
 The Front Shape: Ball  
 Lamp type: Ring illuminated(LED)  
 The Crust Material:  
 • Stainless steel  
 IP Degree: IP67, IK10

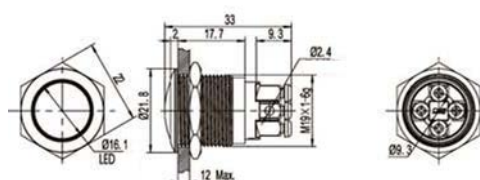

14  
\*  
51

