

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Ø 25 - 28 mm


S-TOP-25F-E



Diameter: Ø 25mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC/2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Ring illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

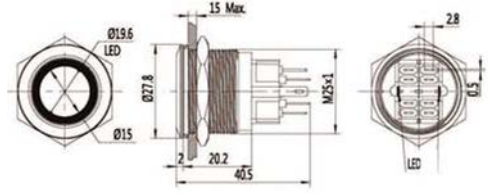


S-TOP-25F-D



Diameter: Ø 25mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC/2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Dot illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

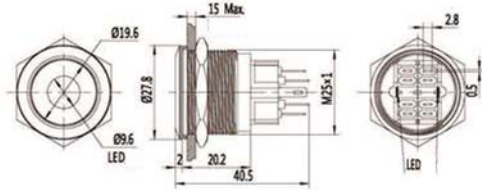


S-TOP-25F-EP



Diameter: Ø 25mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC/2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Power symbol illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

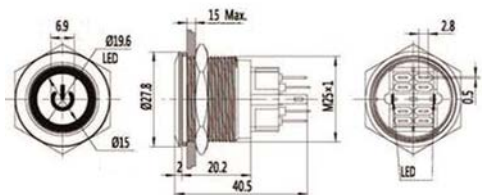


S-TOP-28F



Diameter: Ø 28mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

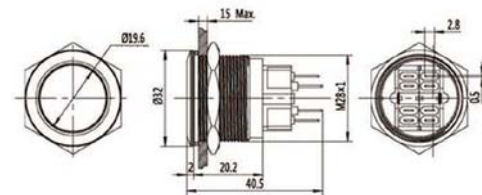

14
*
60

Anti-vandal Switch

Pb

ROHS