

Ø 40 mm

TOPTTEK®
HARDWARE ELECTRONIC MANUFACTURER



www.toptek-co.com


S-TOP-40F



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

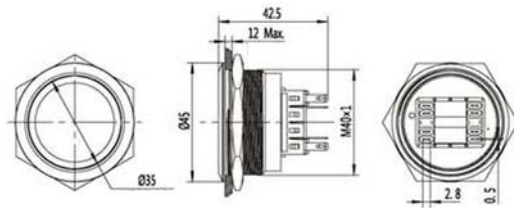


S-TOP-40B



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Ball
The Crust Material: Stainless steel
IP Degree: IP67, IK10

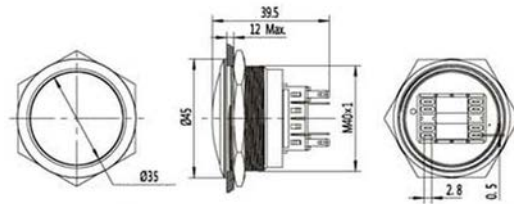


S-TOP-40H



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: High
The Crust Material: Stainless steel
IP Degree: IP67, IK10

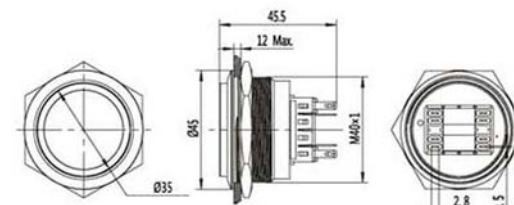


S-TOP-40F-E



Diameter: Ø 40mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

Lamp type: Ring illuminated (LED)
The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

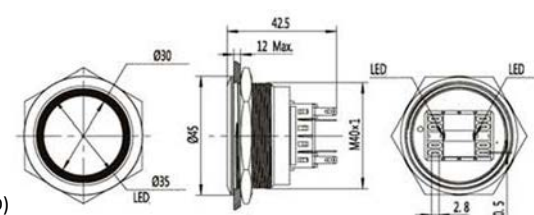

14
*
63

