

CONNECTOR MANUFACTURERS



Box Header 2.0mm Elevated SMT Type

Specifications

Current Rate: 2.0 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C




Material

Insulator: Polyester, UL 94V-0



© Standard: LCP

Terminal: Copper Alloy

Plating: Gold Plated

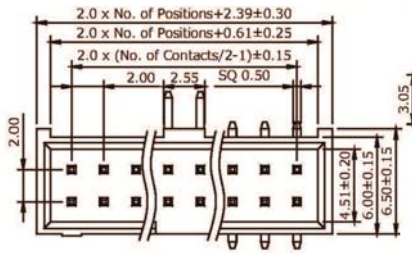


Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Part No.: BH2EGM-XX-U

ORDER INFORMATION

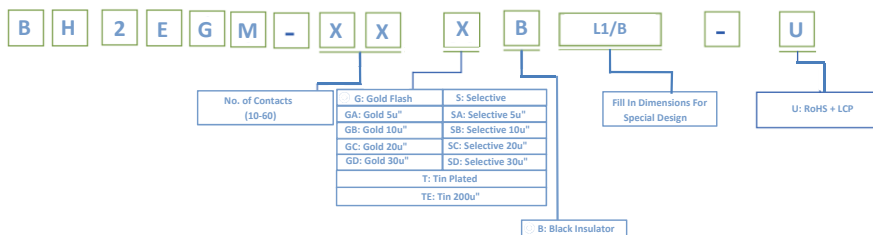

©: Standard Recommend

