

Box Header 2.0mm SMT / Right Angle / Straight / Elevated Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: LCP or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

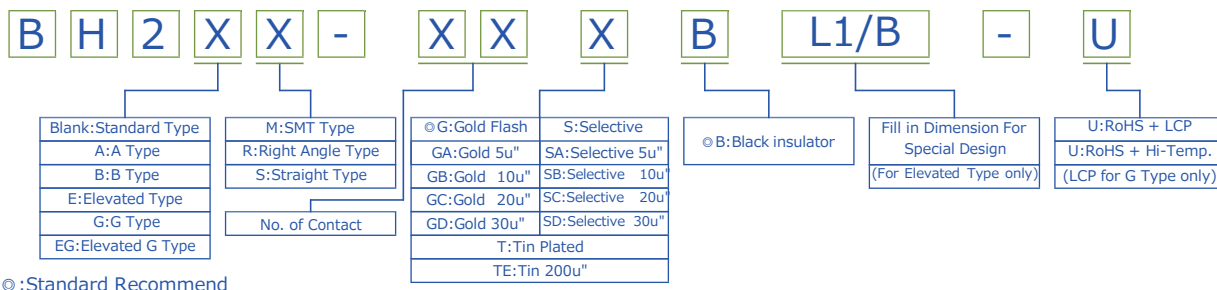


Box Header 2.0mm

Box Header 2.0mm H=5.6mm SMT / Right Angle / Straight Type

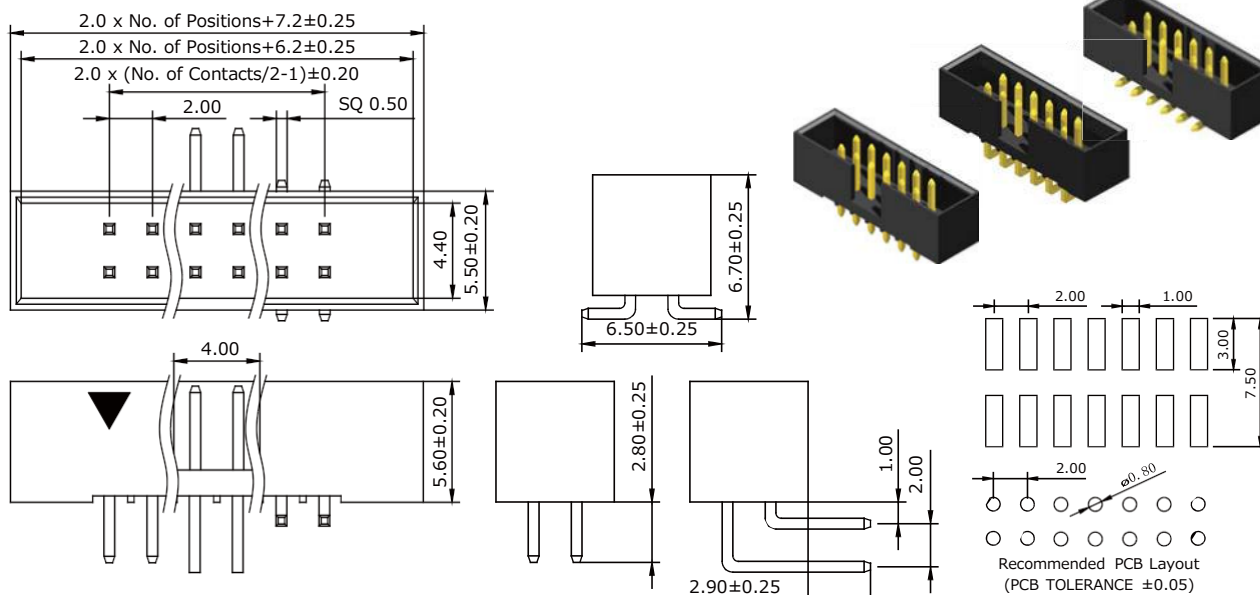

Part No.: BH2M/R/S-XX-U

Box Header 2.0mm H=5.6mm Elevated SMT / Straight Type

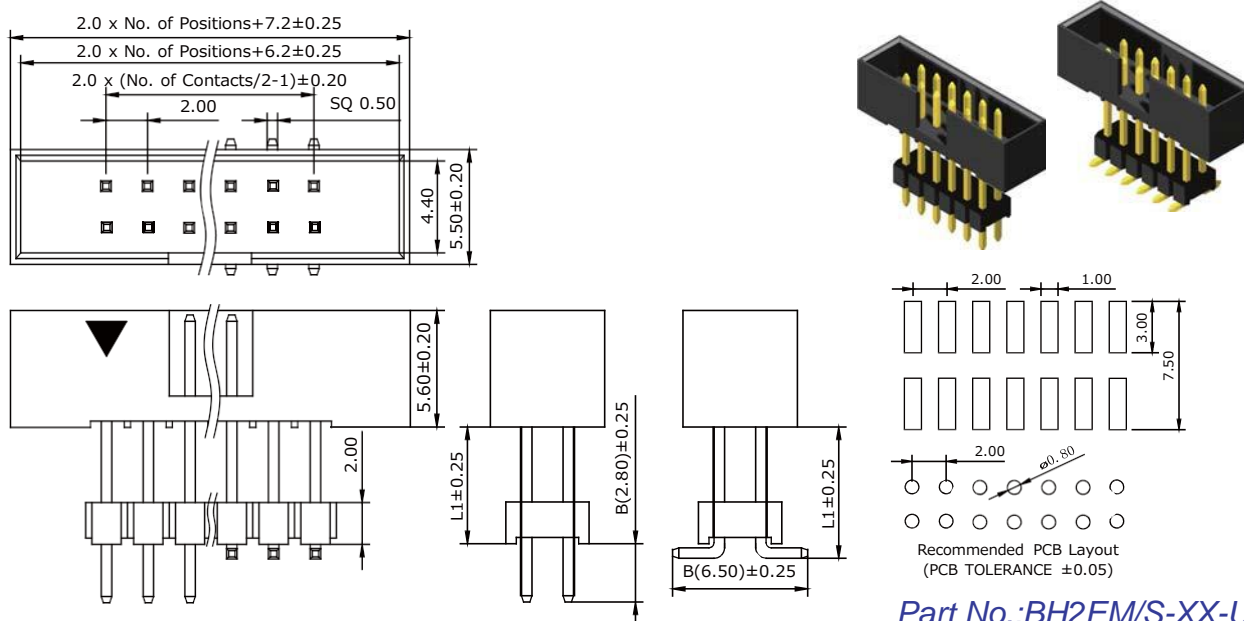

Part No.: BH2EM/S-XX-U

