

# CONNECTOR MANUFACTURERS

TOPTEK®





## Box Header 1.27x1.27mm Straight Type

### Specifications

Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C


### Material

Insulator: Polyester, UL 94V-0  
 © Standard: Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

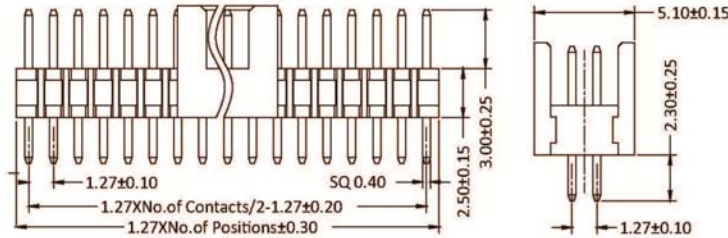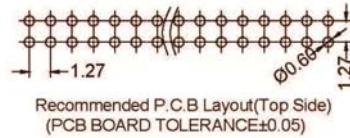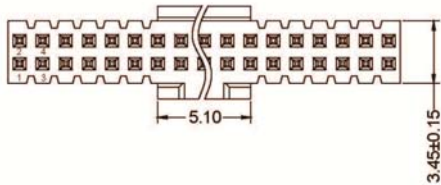

Part No.: BPH3S-XX-U

## ORDER INFORMATION

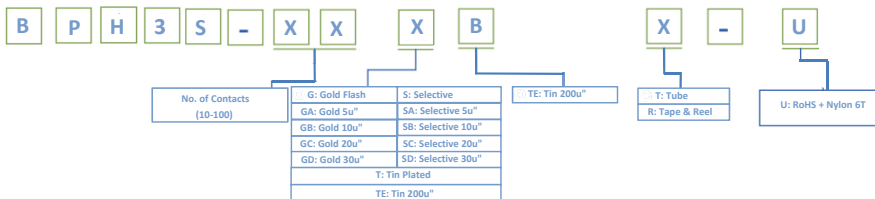

©: Standard Recommend

Box Header 1.27 mm



RoHS