

CONNECTORS MANUFACTURER



DIN 41612 Long Body C Type Male

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Brass

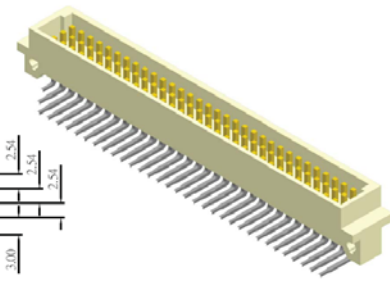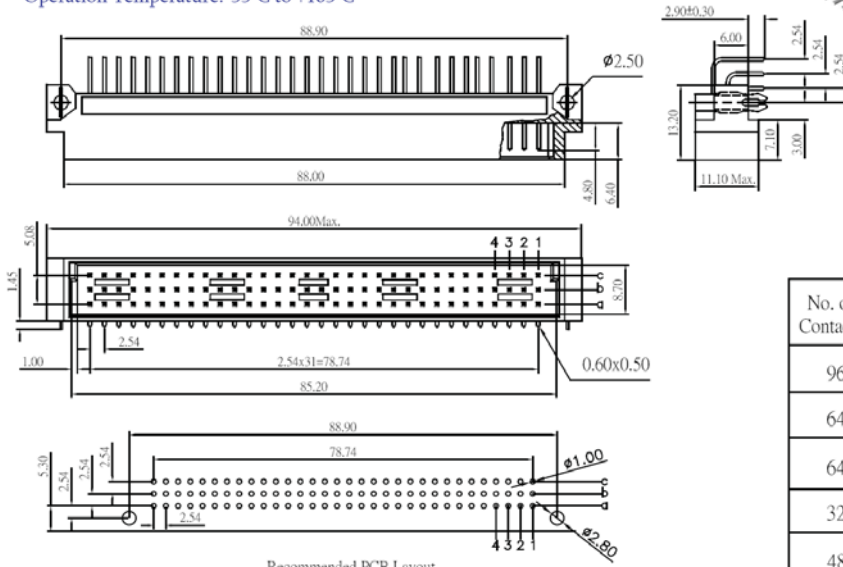

No. of Contacts	Rows/Positions With Contacts	Pitch
96	a+b+c	2.54mm
64A	a+c	
64B	a+b	
32	a	5.08mm Half-Loaded
48	a+b+c All Even No.	
32	a+c All Even No.	

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.: DINLR-M3XX-L



DIN 41612 Long Body C Type Female

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

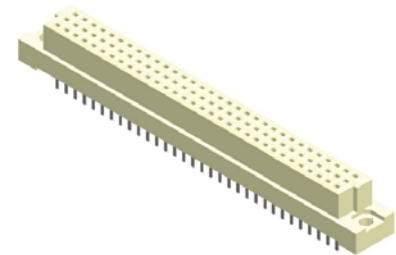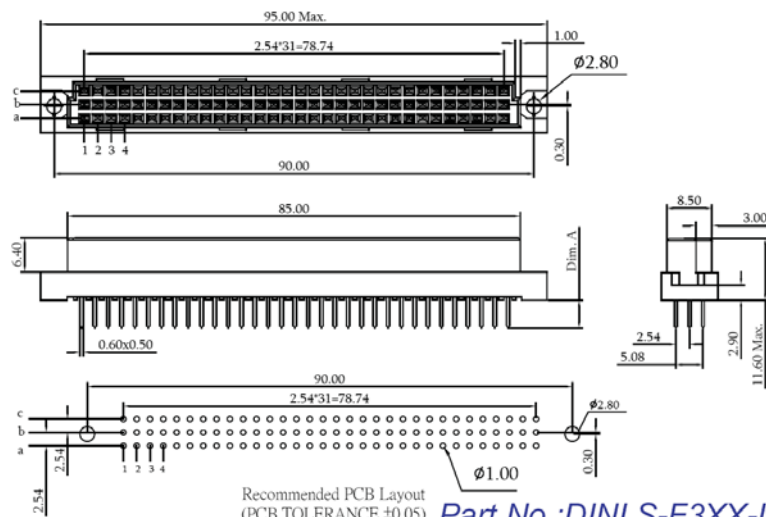


No. of Contacts	Rows/Positions With Contacts	Pitch
96	a+b+c	2.54mm
64A	a+c	
64B	a+b	
32	a	5.08mm Half-Loaded
48	a+b+c All Even No.	
32	a+c All Even No.	

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.: DINLS-F3XX-L

ORDER INFORMATION

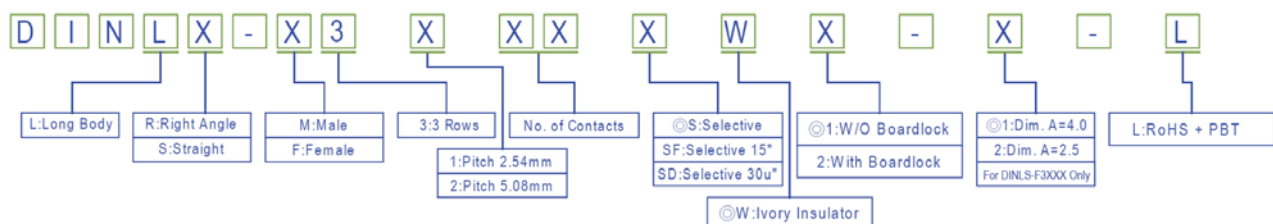

©: Standard Recommended

DIN 41612 Conn. Series

RoHS