

CONNECTORS MANUFACTURER



DIN 41612 Long Body R Type Male

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Brass

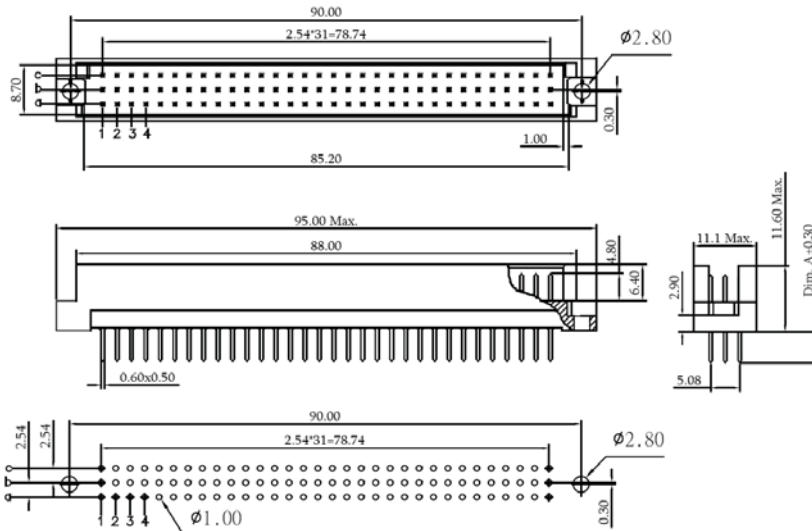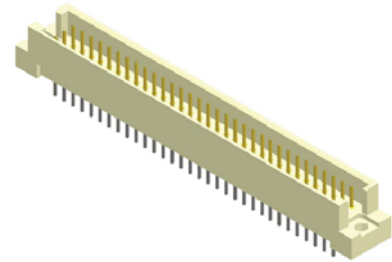

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

Part No.: DINLS-M3XX-L

No. of Contacts	Rows/Positions With Contacts	Pitch
96	a+b+c	2.54mm
64A	a+c	
64B	a+b	
32	a	
48	a+b+c All Even No.	5.08mm Half-Loaded
32	a+c All Even No.	



DIN 41612 Long Body R Type Female

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

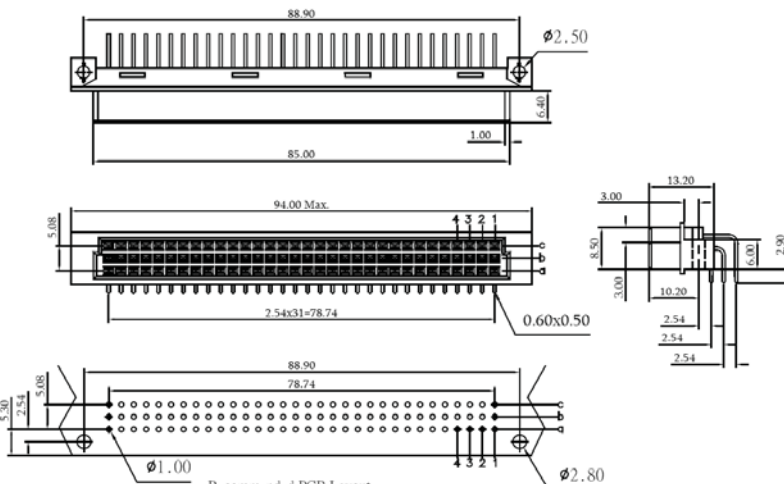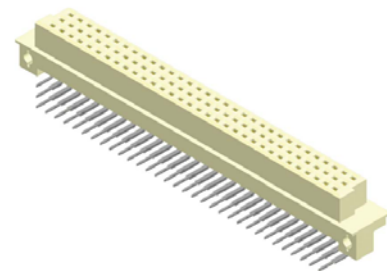


Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

Part No.: DINLR-F3XX-L

No. of Contacts	Rows/Positions With Contacts	Pitch
96	a+b+c	2.54mm
64A	a+c	
64B	a+b	
32	a	
48	a+b+c All Even No.	5.08mm Half-Loaded
32	a+c All Even No.	

ORDER INFORMATION

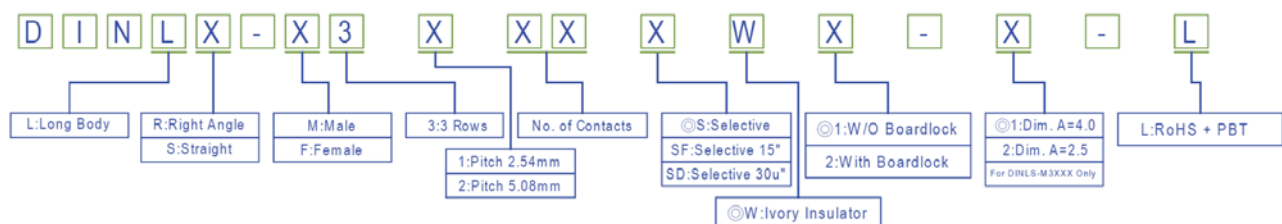

©: Standard Recommended

DIN 41612 Conn. Series

RoHS