

CONNECTORS MANUFACTURER

DIN 41612 Conn. Series



DIN 41612 Long Body Q Type Male

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Brass

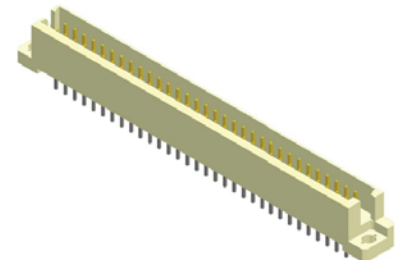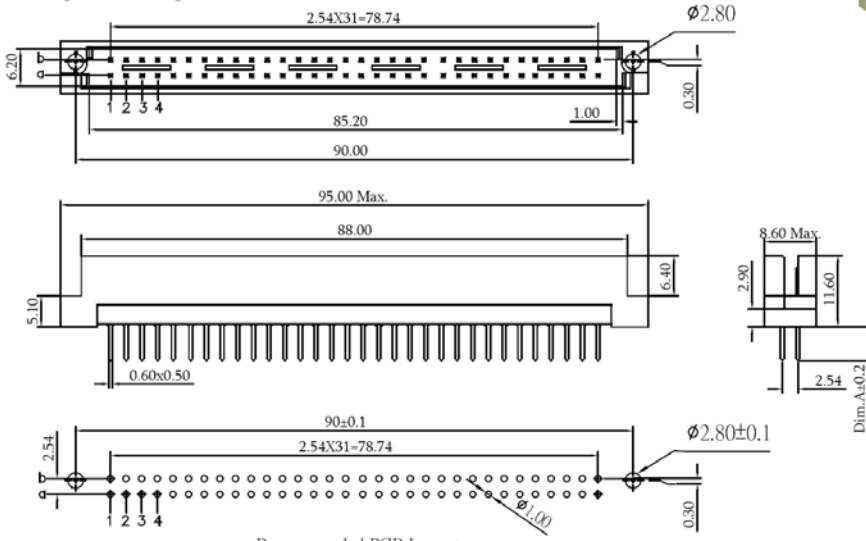

No. of Contacts	Rows/Positions With Contacts	Pitch
64	a+b	2.54mm
32	a	
32	a+b All Even No.	5.08mm Half-Loaded
16	a All Even No.	

Part No.: DINLS-M2XX-L



DIN 41612 Long Body Q Type Female

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

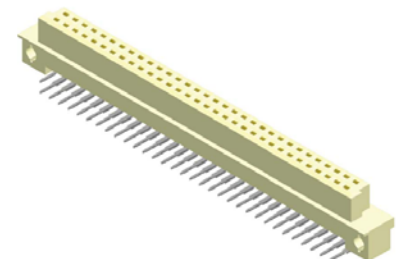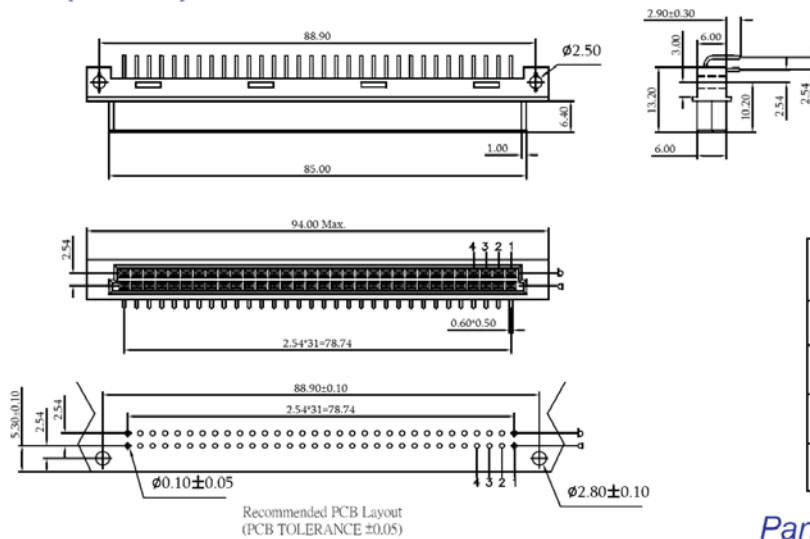

No. of Contacts	Rows/Positions With Contacts	Pitch
64	a+b	2.54mm
32	a	
32	a+b All Even No.	5.08mm Half-Loaded
16	a All Even No.	

Part No.: DINLR-F2XX-L

ORDER INFORMATION

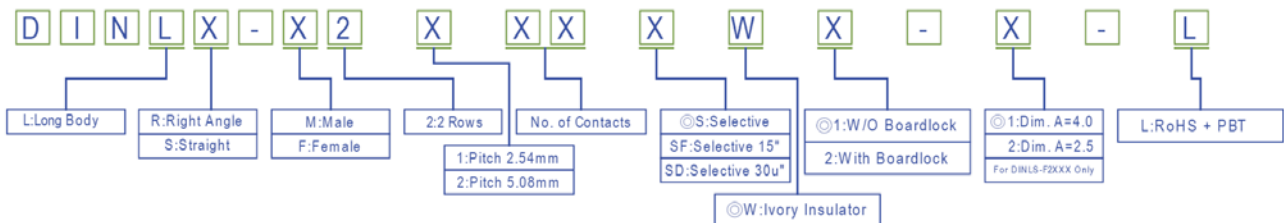

©:Standard Recommended