

CONNECTOR MANUFACTURERS

TOPTEK®






Ejector Header 2.0mm H= 8.1mm SMT Type

Specifications

Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 © Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

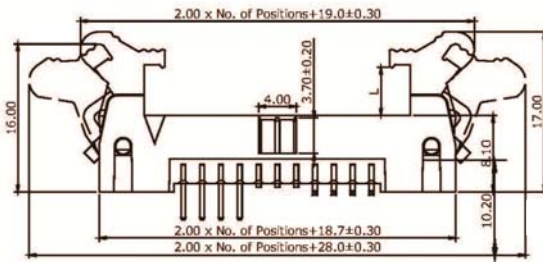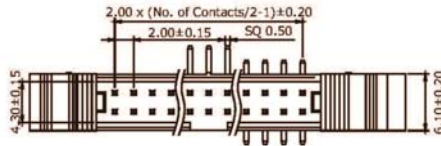

Part No.: EDH2M-XX-U

ORDER INFORMATION

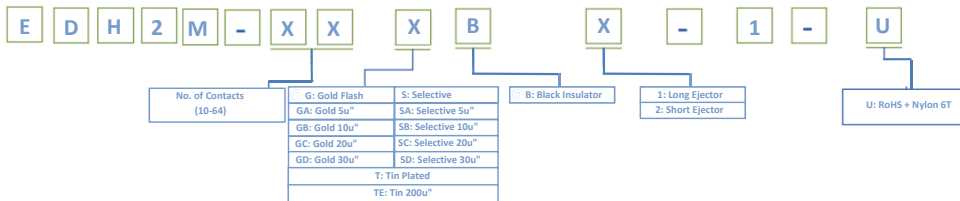

©: Standard Recommend

Ejector Header 2.0 mm



RoHS