

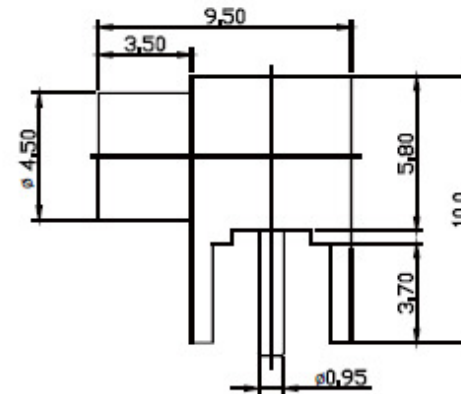



MCX & MMCX Conn. Series

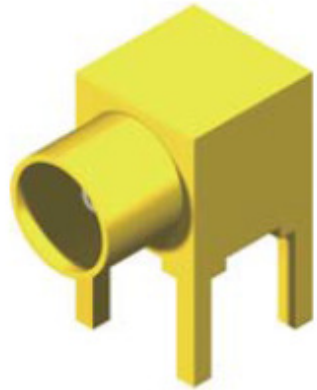

Part No.: MCX006-F  GW-L
5:50 Ω 7:75 Ω 

NO	DESCRIPTION	MATERIAL	FINISH	QTY
5	DIELECTRIC	TEFLON		1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1

IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 VRMS MIN
WORKING VOLTAGE	335 VRMS MAX.
INSULATION RESISTANCE	1000 MEGOHMS MIN
CONTACT RESISTANCE	INNER CONDUCTOR = 5.0 MILLIOHMS
	OUTER CONDUCTOR = 2.5 MILLIOHMS

TOPTEK
Hardware Electronic Components



www.toptek-co.com