

CONNECTOR MANUFACTURERS

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com


Pin Header 3.96mm 1 Row H=3.18mm Straight Type

Specifications

Current Rate: 7 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0
©Standard: LCP
Terminal: Copper Alloy
Plating: Tin Plated

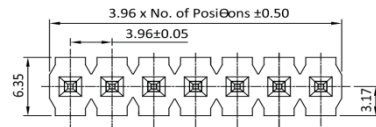

Recommended PCB Layout
(PCB TOLERANCE ±0.05)


Table:

LEAD STYLE	Dimensions	
	Dim.A	Dim.B
02	11.45	4.45
03	12.70	4.45
04	20.55	4.00
05	3.80	12.10
06	11.43	3.18

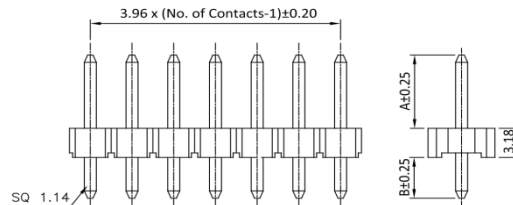

Part No.: PH396S32-1XX-X

ORDER INFORMATION

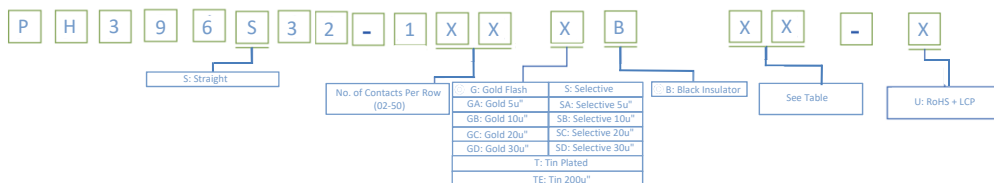

©: Standard Recommend



RoHS