



RoHS





Pin Header 5.08mm 1 Row H=2.5mm Stack SMT Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




Specifications
 Current Rate: 7 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material
 Insulator: Polyester, UL 94V-0
 Standard: LCP
 Terminal: Copper Alloy
 Plating: Tin Plated

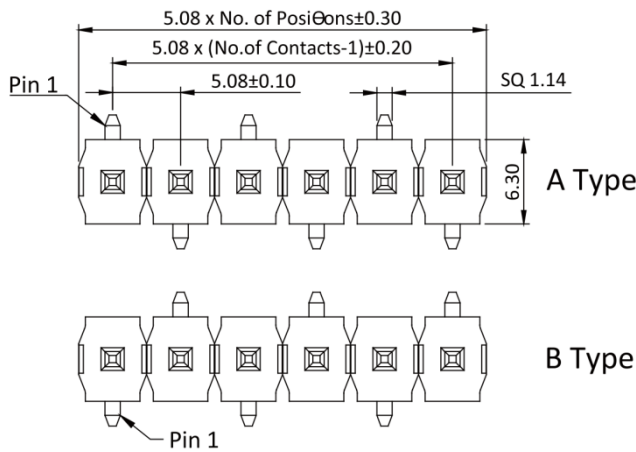

Recommended PCB Layout (PCB TOLERANCE ±0.05)

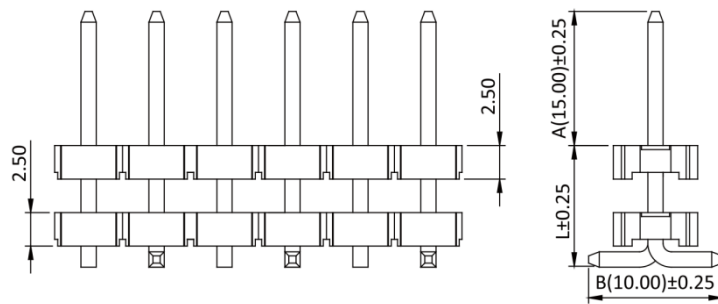

ORDER INFORMATION

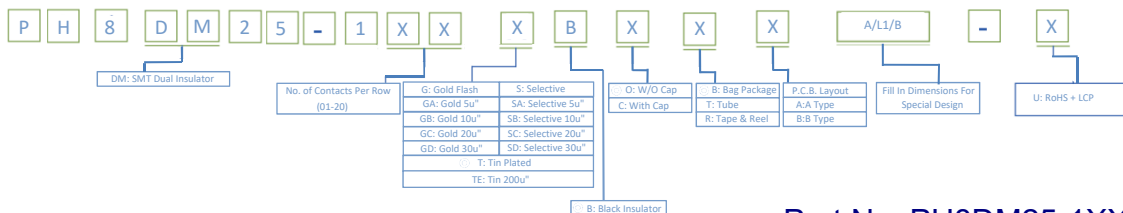

©: Standard Recommend

Part No.: PH8DM25-1XX-X

