

# CONNECTOR MANUFACTURERS

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER

 www.toptek-co.com

## Female Header 2.54mm 2 Row H=7.1mm SMT Type

### Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute





Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0


Terminal:Copper Alloy

Plating:Gold Plated

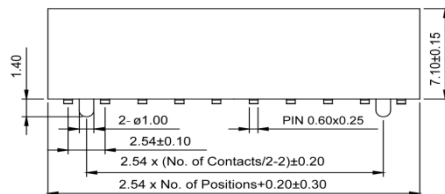

Part No.:PS1M71-2XX-U

## ORDER INFORMATION

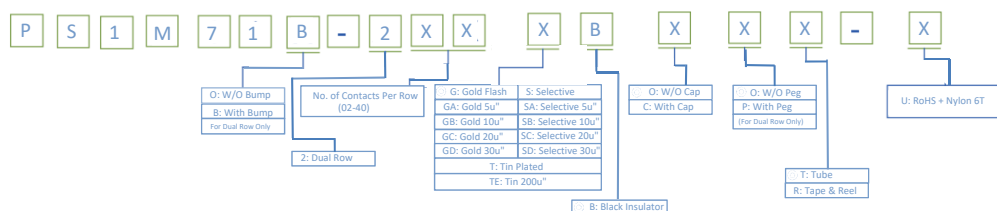

©:Standard Recommend