

# FEMALE HEADER 2.00mm

## Female Header 2.0mm 1 Row H=3.5mm Solder Eye SMT Type




### Specifications




Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |  
 Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

### Material

Insulator:Polyester, UL 94V-0 | Standard:PBT or nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



## ORDER INFORMATION

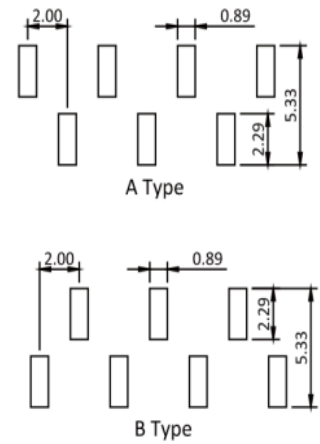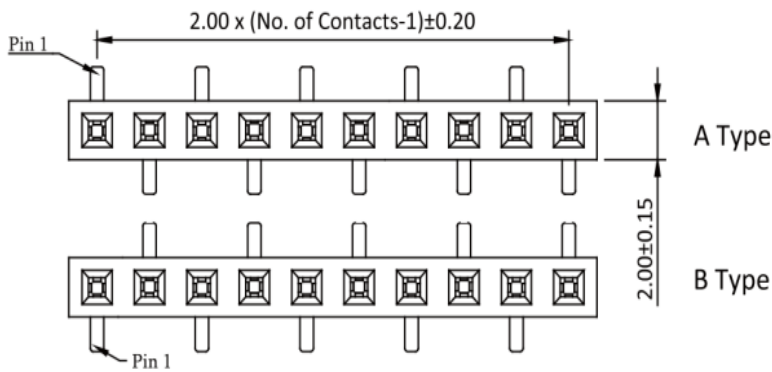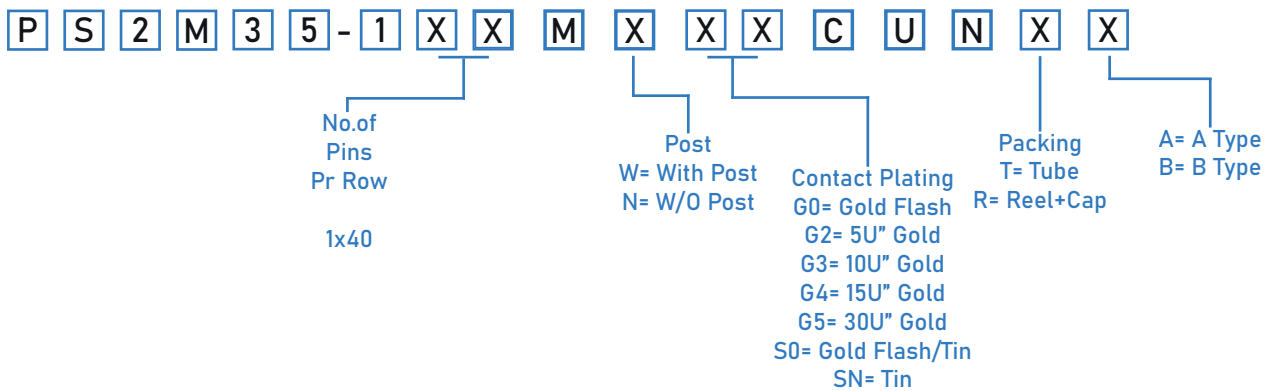

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

