

# FEMALE HEADER 1.7mm

## Female Header 1.7mm 2 Row H=4.4mm Right Angle Type

**TOPTTEK**<sup>®</sup>  
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




### Specifications


Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |  
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

### Material

Insulator:Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



## ORDER INFORMATION

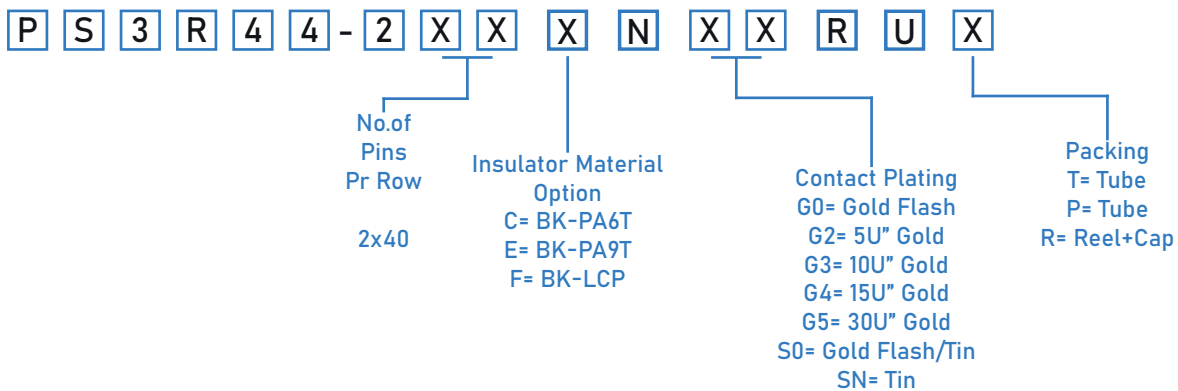

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

