



S.ATA 7+15P SMT R/A Type

Specifications

Current Rate:1.5 AMP
Insulation Resistance:1000M Ω Min
Contact Resistance:30 m Ω Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-55° C to +125° C

Material

Insulator:High temperature thermoplastic,UL 94V-0
Standard:LCP
Terminal:Copper Alloy
Plated:Selective Plated

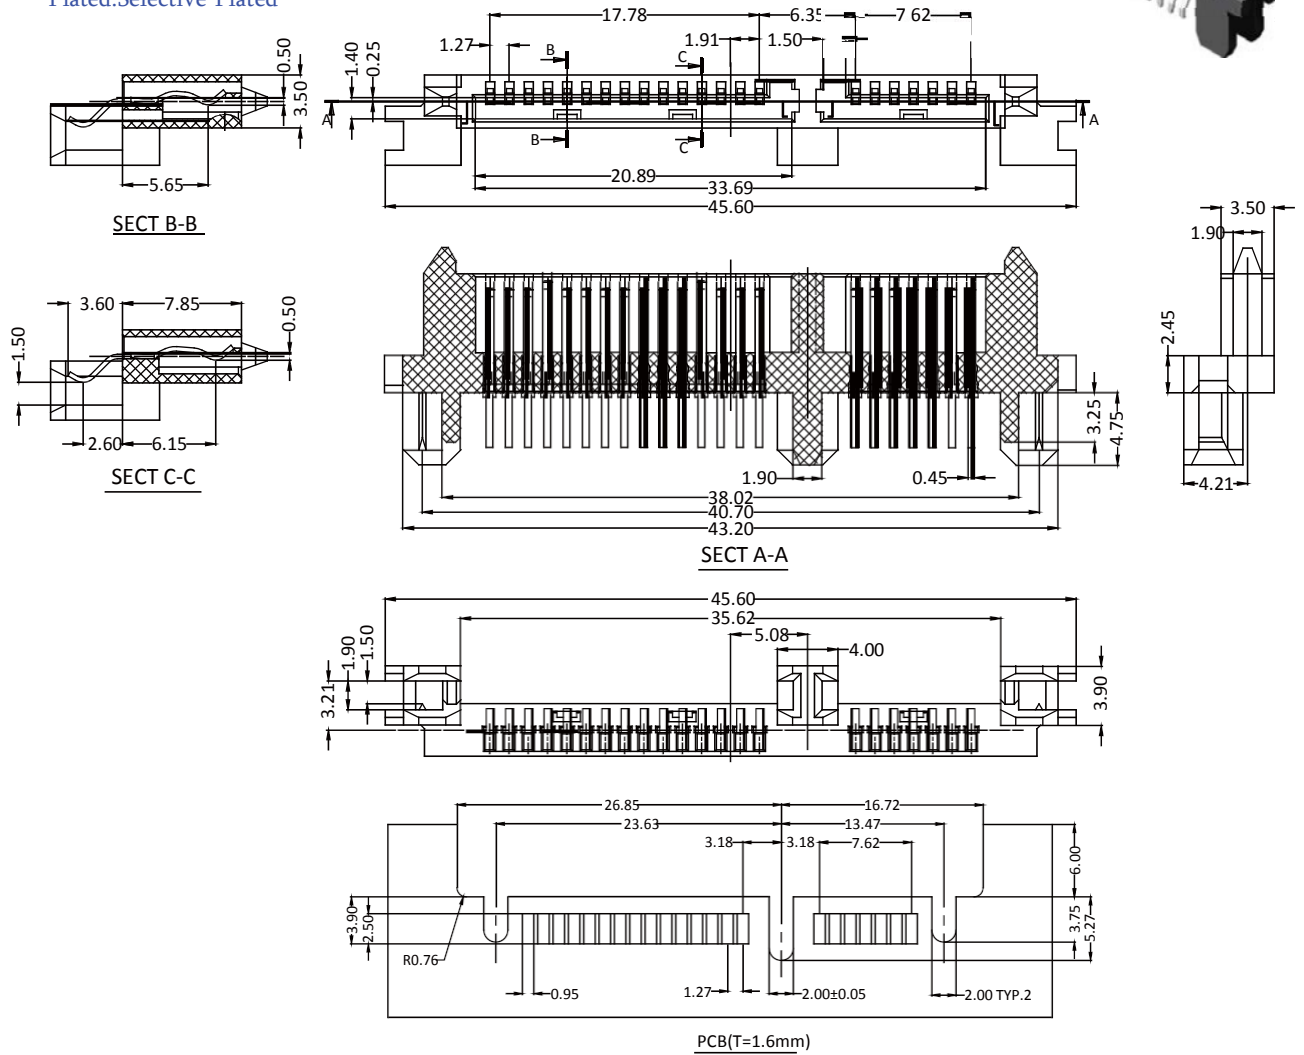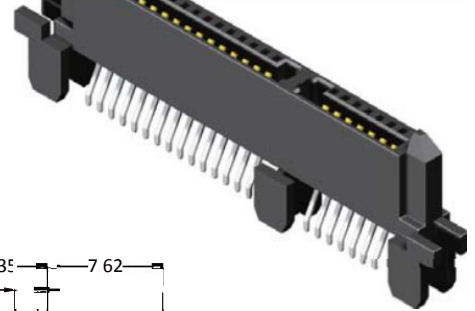

Part No.:SATAMR-F22SB-R6-U

ORDER INFORMATION

