

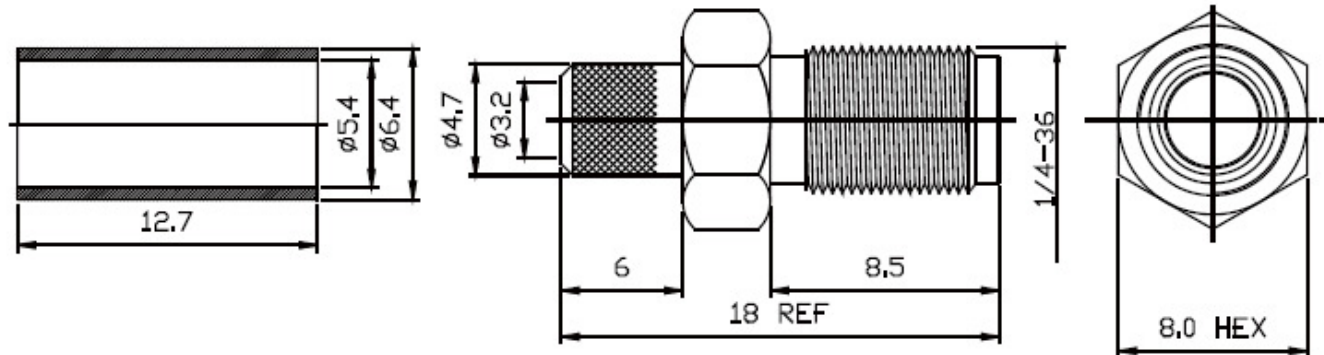


# SMA Conn. Series



**SMA001-F**  **GW-L**  
5:50 Ω 7:75 Ω



NO	DESCRIPTION	MATERIAL	FINISH	QTY
5	FERRULE	BRASS	GOLD	1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1

**TOPTEK**  
HARDWARE ELECTRONIC COMPONENTS



[www.toptek-co.com](http://www.toptek-co.com)

IMPEDANCE	50/75 OHM
FREQUENCY	0-12 GHz
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS	1000V
WORKING VOLTAGE DC	500V
INSULATION RESISTANCE	5000 MEGOHMS MIN.
CONTACT RESISTANCE	INNER CONDUCTOR OUTER CONDUCTOR
	≤ 3 MILLIOHMS ≤ 0.5 MILLIOHMS
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTOR RIGHT ANGLE CONNECTOR
	.15 dB MAX. AT 1.0GHz .30 dB MAX. AT 1.0GHz