

# PIN HEADER 2.54

Pin Header 2.54mm 2 Row H=2.5/1.7/1.5mm Stack SMT Type

**TOPTTEK**<sup>®</sup>

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com



RoHS 2002/95/EC

## Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ | Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

## Material






Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated



## ORDER INFORMATION

**P H 1 D M 2 5 - 2 X X X X X X M PA/W/C/L1 X**

- PD**  
25=2.5mm  
17=1.7mm  
15=1.5mm
- No. of Pins Pr Row**  
2x40
- Insulator Material Option**  
A=BK-PBT  
B=BK-PA66  
C=BK-PA6T  
D=BKPA46  
F=BK-LCP
- Post**  
W=With Post  
N=W/O Post
- Contact Plating**  
G0=Gold Flash  
G2=5U" Gold  
G3=10U" Gold  
G4=15U" Gold  
G5=30U" Gold  
S0=Gold Flash/Tin  
SN=Tin
- PA/W/C/L1= Pin Length**
- Packing**  
0=PE Bag  
A=Tray  
T=Tube  
P=Tube+Cap  
R=Reel+Cap

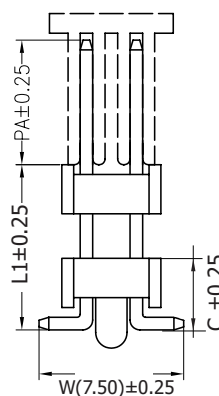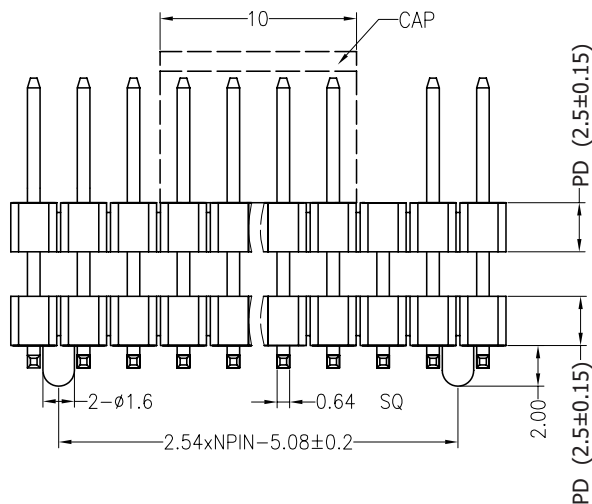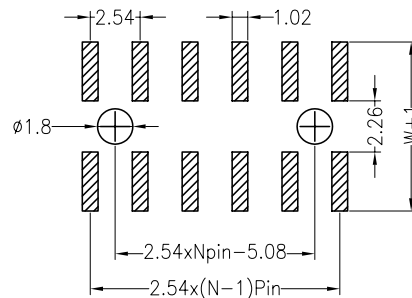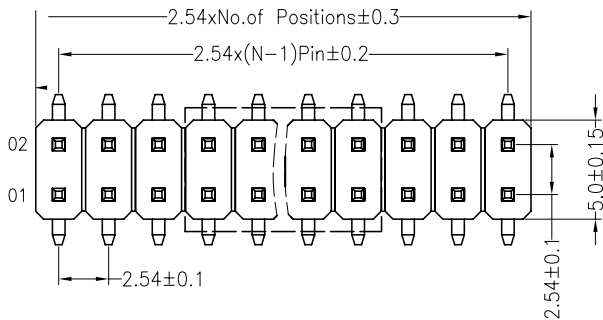

PD	C
2.50mm	3.30mm
1.70mm	2.50mm
1.50mm	2.30mm

ITEM	PA	W	L1
Standard	6.00	7.50	XX

Alternate